UNCLASSIFIED

AD NUMBER
AD912061
LIMITATION CHANGES

TO:
Approved for public release; distribution is unlimited.

FROM:
Distribution authorized to U.S. Gov't. agencies only; Test and Evaluation; DEC 1971. Other requests shall be referred to Air Force Aeronautical Systems Division, SDXT, Wright-Patterson AFB, OH 45433.

AUTHORITY

asd, usaf ltr, 8 apr 1974

THIS PAGE IS UNCLASSIFIED

AEDC-TR-71-271

AERODYNAMIC CHARACTERISTICS OF A 0.12-SCALE MODEL OF THE A-9A AIRCRAFT AT MACH NUMBERS FROM 0.30 TO 0.80

Warren E. White

ARO, Inc.

December 1971

This document has been approved for public release
its distribution is unlimited. per TAB 74-10
dtd. 10 May '74

Distribution limited to U.S. Government agencies only;
this report contains information on test and evaluation of
military hardware; December 1971; other requests for this
document must be referred to Aeronautical Systems
Division (SDXT) Wright-Patterson AFB, OH 45433.

PROPULSION WIND TUNNEL FACILITY
ARNOLD ENGINEERING DEVELOPMENT CENTER
AIR FORCE SYSTEMS COMMAND
ARNOLD AIR FORCE STATION, TENNESSEE

NOTICES

AERODYNAMIC CHARACTERISTICS OF A
0.12-SCALE MODEL OF THE A-9A AIRCRAFT
AT MACH NUMBERS FROM 0.30 TO 0.80

Warren E. White
ARO, Inc.

FOREWORD

The work reported herein was done at the request of the Aeronautical Systems Division (ASD), Air Force Systems Command (AFSC), for the Northrop Corporation, Hawthorne, California, under Program Element 64211F, System 329A.

The results of the test presented were obtained by ARO, Inc. (a subsidiary of Sverdrup & Parcel and Associates, Inc.), contract operator of the Arnold Engineering Development Center (AEDC), AFSC, Arnold Air Force Station, Tennessee, under Contract F40600-72-C-0003. The tests were conducted from August 17 through 24, 1971, under ARO Project No. PB0190. The manuscript was submitted for publication on November 1, 1971.

This technical report has been reviewed and is approved.

George F. Garey
Lt Colonel, USAF
AF Representative, PWT
Directorate of Test

Duncan W. Rabey, Jr.
Colonel, USAF
Director of Test

ABSTRACT

Wind tunnel tests were conducted at Mach numbers from 0.30 to 0.80 and Reynolds numbers from 2.3 to 7.0 million on a 0.12-scale model of the A-9A aircraft to determine the effects of control surface deflections on the aerodynamic characteristics of the airplane. The results showed that the horizontal stabilizer was 20 to 50 percent more effective in pitching moment per degree of deflection than the elevator, the rudder remained effective at all Mach numbers, and the aileron deflections produced significant effects on lift, drag, and pitching and rolling moment. Minimum drag was increased by approximately 100 and 600 percent for speed brake deflections of 20 and 60 deg, respectively, at Mach numbers from 0.70 to 0.80.

CONTENTS

APPENDIXES

I. ILLUSTRATIONS

The header

NOMENCLATURE

b	Reference wing span, 82.08 in.
BETA	Sideslip angle, deg
BL	Buttock line, in.
C_D	Drag coefficient, drag/$q_\infty S$
C_L	Lift coefficient, lift/$q_\infty S$
C_ℓ	Rolling-moment coefficient, rolling moment/$q_\infty Sb$
C_m	Pitching-moment coefficient, pitching moment/$q_\infty S\bar{c}$
C_n	Yawing-moment coefficient, yawing moment/$q_\infty Sb$
C_Y	Side-force coefficient, side force/$q_\infty S$
$\bar{c}$	Reference chord, 14.46 in.
F.S.	Fuselage station, in.
H_L	Control surface hinge line
M_∞	Free-stream Mach number
q_∞	Free-stream dynamic pressure, psf
Re	Reynolds number based on model $\bar{c}$
S	Reference wing area, 8.064 sq ft
WL	Waterline, in.
a	Angle of attack, deg
δ_{AL}	Left aileron only, positive, trailing edge down, deg
δ_B	Speedbrake deflection, measured from the centerline of the aileron trailing edge, deg
δ_E	Elevator deflection, positive, trailing edge down, deg
δ_H	Horizontal stabilizer incidence angle, positive, leading edge up, deg
δ_R	Rudder deflection, positive, trailing edge left, deg

SECTION I
INTRODUCTION

Wind tunnel investigations of a 0.12-scale model of the A-9A aircraft were conducted in the Propulsion Wind Tunnel (16T) for the Northrop Corporation at Mach numbers of 0.30, 0.60, 0.70, 0.75, and 0.80 at angles of attack and sideslip from -10 to 20 deg and 0 to 5 deg, respectively. Configuration variables included elevator, rudder, aileron, and speed brake deflections, horizontal tail dihedral angles, horizontal stabilizer incidence angles, external stores, and exit-nozzle core cowls. In addition, internal-duct drag was determined from the pressure data obtained from the exit nozzle and core cowl rakes. The primary purpose of the test was to obtain data at high subsonic Mach numbers at high Reynolds numbers.

SECTION II
APPARATUS

2.1 TEST FACILITY

Tunnel 16T is a continuous flow, closed-circuit, variable density wind tunnel capable of operating at Mach numbers from 0.15 to 1.60. The test section is 16 by 16 ft in cross section and 40 ft long. Perforated walls in the test section allow continuous operation through the Mach number range with a minimum of wall interference. A more extensive description of the test facility is given in the Test Facilities Handbook.[1] The sting support system was composed of a vertical support strut, sting support boom, and the high-angle-of-attack sting support system with an auxiliary roll mechanism.

The high-angle-of-attack sting support system was utilized to obtain angles of attack from -12 to 20 deg and also enable variations in sideslip by rolling the sting. Location of the model in the test section and details of the perforated walls are shown in Fig. 1 (Appendix I). Photographs of the model are presented in Fig. 2.

2.2 TEST ARTICLE

2.2.1 Aircraft Model

The test article was a 0.12-scale model of the A-9A aircraft which represented the prototype configuration. Details of the model are presented in Figs. 3 and 4 where the complete configuration is shown and the individual components are identified. The aileron (left wing only), elevators, and rudder were remotely controlled, whereas the speed brakes, horizontal tail dihedral, and horizontal stabilizer incidence angles were set manually during configuration changes. The model had flow-through inlets with ducts to simulate exit nozzles. The wing incidence angle was 0 deg with respect to the fuselage waterline. A 0.10-in.-wide boundary-layer trip was composed of number 80 grit and was located 0.80 in. from the leading edge of both surfaces of the wings and vertical and horizontal

---

[1]Test Facilities Handbook (Ninth Edition). "Propulsion Wind Tunnel Facility, Vol. 4." Arnold Engineering Development Center, July 1971.

stabilizers. In addition, a 0.10-in.-wide boundary-layer trip was affixed 0.80 in. aft of the nose. The index to model components and the configurations tested are listed in Table I (Appendix II).

2.2.2 Pylons and Store Models

The stores tested during this investigation were the MK-82 500-lb Bomb and the BLU-1/B Napalm Bomb. Sketches of these stores, associated pylons, and dispenser racks are presented in Figs. 4e, f, g, and h. All stores and pylons were nonmetric and were installed symmetrically on the parent model about its plane of symmetry.

2.3 INSTRUMENTATION

The overall aerodynamic forces and moments on the model were measured with a six-component, internal, strain-gage balance. The sensing components of the balance consisted of forward and aft normal-force elements (for determination of normal force and pitching moment), forward and aft side-force elements (for determination of side force and yawing moment), an axial-force element, and a rolling-moment element. Static pressures were measured at the sting entrance to the model and within the model cavity. A rake was attached to the model and positioned to measure pressures at the exit plane of the engine duct. The sting pitch angle was determined from the output of a strain-gaged angular position indicator. Sting roll angle was determined from the output of a potentiometer. The aileron, elevator, and rudder were instrumented with strain-gage hinge moment beams. The rotational angle of these surfaces was determined from the outputs of potentiometers. Electrical signals from the balances, pressure transducers, model attitude systems, and hinge-moment beams were digitized and recorded on magnetic tape, as well as fed directly to a computer for on-line data reduction. The balance and hinge-moment outputs were also recorded on an oscillograph for monitoring model dynamics.

SECTION III
TEST CONDITIONS AND PROCEDURE

3.1 TEST DESCRIPTION

The test was conducted at Mach numbers from 0.30 to 0.80 and Reynolds numbers of 2.3, 4.5, and 7.0 million based on the wing mean aerodynamic chord. The total pressure ranged from approximately 3660 psfa at $M_\infty = 0.60$ and Re = 7.0 x 10^6 to 1071 psfa at $M_\infty = 0.8$ and Re = 2.3 x 10^6. Total temperature was maintained at approximately 105°F for all Mach numbers.

Tunnel conditions were held constant at each Mach number, while the angle of attack was varied from -10 to 20 deg. For related configurations, combinations of a constant beta of 5 deg and angles of attack were obtained by pitching and rolling the model. The maximum angle of attack was limited to lower values in certain cases because of reaching dynamic load limits. Model variables included remotely controlled aileron, elevator, and rudder angles of 0, ±5, ±10, ±20, and ±30 deg; 0, ±5, and ±10 deg; and 0, 10, 20, and 30 deg, respectively. Additional configurations consisted of manually controlled

speedbrake, horizontal tail dihedral, and horizontal stabilizer incidence angles of 0, -20, and -60 deg; 0 and 10 deg; and 0 and ±2 deg, respectively.

3.2 ACCURACY OF MEASUREMENTS

The precision of setting and maintaining Mach number is estimated to be within ±0.004 for Mach numbers of 0.3 and ±0.003 and for Mach numbers from 0.60 to 0.80. Flow angularity corrections in the vertical plane of the tunnel, deduced from the upright and inverted runs, have been applied. Measured force and moment data on the balance were corrected for weight tares. No corrections have been made for cavity pressure base drag; however, internal duct drag-force data were measured and subtracted from the total drag force of the model. In addition to the measured drag values, interpolated values were used where measured data were not available.

The estimated uncertainties in the static-force data are given in the following table and are based on 95-percent probability.

Parameter	M_∞				
	0.30	0.60	0.70	0.75	0.80
α	±0.1	±0.1	±0.1	±0.1	±0.1
β	±0.1	±0.1	±0.1	±0.1	±0.1
C_L	±0.0158	±0.0083	±0.0060	±0.0047	±0.0037
C_m	±0.0031	±0.0082	±0.0010	±0.0011	±0.0011
C_Y	±0.0104	±0.0028	±0.0025	±0.0023	±0.0022
C_n	±0.0006	±0.0002	±0.0002	±0.0008	±0.0002
C_ℓ	±0.0004	±0.0001	±0.0001	±0.0005	±0.0001
C_D	±0.0031	±0.0019	±0.0020	±0.0012	±0.0011

SECTION IV
RESULTS AND DISCUSSION

4.1 GENERAL

The primary purpose of this investigation was to determine the effects of deflecting the aileron, elevator, rudder, and speed brakes on the aerodynamic forces and moments. These forces and moments were reduced to aerodynamic coefficients in the stability axes system about a moment reference center that was located at the quarter chord of the mean aerodynamic chord. The large volume of data obtained during this test precludes making detailed analysis of all the test data. Consequently, this report includes only the analysis of data from aileron, elevator, rudder, and speed brake deflections of the basic model with and without the empennage for nominal Reynolds numbers of 2.3 and 4.5 million at Mach numbers 0.3 and from 0.60 to 0.80, respectively. The complete test is documented in Table II where the part numbers are presented for each model configuration and test conditions for which data were obtained.

4.2 LONGITUDINAL STABILITY AND CONTROL

Presented in Fig. 5 are the curves of C_N, C_m, and C_D obtained during the tail component buildup tests. The ailerons, elevator, and rudder remained at zero, whereas the horizontal tail was installed at -2-deg incidence angle. As expected, Configurations XD_6 and $XD_6 S_{1-5} V_2 d_2 r_3$ (see Table I) were statically unstable, since these configurations were without a horizontal tail. The complete model was longitudinally statically stable for the Mach numbers and Reynolds numbers shown. The increase in drag at a lift coefficient of zero for the addition of the vertical tail and the horizontal tail were approximately 11 and 40 percent, 11 and 31 percent, 11 and 33 percent, 4 and 20 percent, and 0 and 10 percent for Mach numbers of 0.30, 0.60, 0.70, 0.75, and 0.80, respectively.

Presented in Fig. 6 are data showing the effectiveness of the horizontal stabilizer for providing longitudinal control as well as the increase in drag because of the change in incidence angle of the horizontal stabilizer. The data showed that linear changes in C_m were produced by deflecting the horizontal stabilizer at Mach numbers of 0.30, 0.60, and 0.70 until buffet onset or stall occurred. The stabilizer effectiveness remained unchanged as free-stream Mach number was increased from 0.30 to 0.70 but decreased with further increases in Mach number. The deflection of the horizontal tail to ±2 deg showed an incremental shift in the lift curve.

The effects of deflecting the elevator on the aerodynamic characteristics of the A-9A model are presented in Fig. 7. Deflections of the horizontal stabilizer and the elevator showed similar effects in pitching moments but with different orders of magnitude which were attributable to the difference in surface areas. The stabilizer was 20 to 50 percent more effective in pitching moment per degree of deflection than the elevator.

4.3 LATERAL STABILITY AND CONTROL

Figure 8 shows a noticeable effect on the lift, drag, pitching moment, and rolling-moment coefficients attributable to aileron deflections. The data showed that as the aileron on the left wing was deflected ±10 deg a proportional increase occurred in C_ℓ at $M_\infty = 0.30$, 0.60, and 0.70. However, at $M_\infty = 0.75$ and 0.80, the negative 10-deg (trailing edge up) deflection did not produce an equivalent ΔC_ℓ to the values obtained for the positive aileron deflection. At $M_\infty = 0.80$, a reversal in the sign of the rolling moment occurred for model angles of attack between 1 and 9 deg for $\delta_{AL} = -10$ deg. This anomaly in the data was eliminated when the speed brakes were deflected 20 and 60 deg at $M_\infty = 0.75$ and 0.80 for $\delta_{AL} = -10$ deg as shown in Figs. 8f and g. Therefore, the reversal in rolling moment at $M_\infty = 0.80$ for the negative 10-deg aileron deflection is attributed to some type of local flow separation which reduced the aileron's effectiveness.

4.4 DIRECTIONAL STABILITY AND CONTROL

The changes in aerodynamic coefficients resulting from rudder deflections at $\beta = 0$ deg are presented in Fig. 9. These data show that the rudder effectiveness was essentially

constant for C_Y, C_n, and C_ℓ up to 20 deg. At rudder deflection angles greater than 20 deg, there was less rudder effectiveness. The rudder remained effective for all Mach numbers.

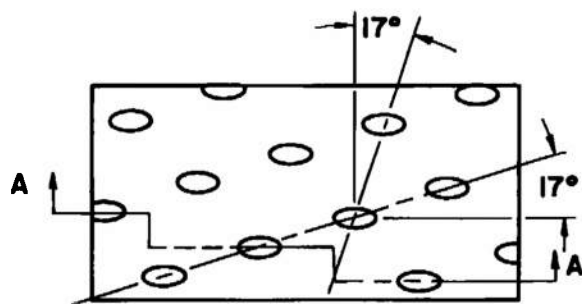## 4.5 SPEED BRAKE EFFECTIVENESS

For data presented in Fig. 10 with the speed brakes deflected, the elevator and the rudder were at 0 deg, whereas the horizontal stabilizer incidence angle was at -2 deg. Deflecting the speed brake 60 deg reduced the value of the lift curve slope and significantly delayed the onset of buffet at Mach numbers of 0.70, 0.75, and 0.80. The speed brake deflection angle of 20 and 60 deg increased the minimum drag by 100 and 600 percent, respectively. The deflection of the speed brake from 20 to 60 deg produced a large destabilizing moment.

SECTION V
CONCLUSIONS

The results of a test conducted at Mach numbers from 0.3 to 0.8 to determine the aerodynamic characteristics of the A-9A aircraft led to the following remarks:

1. The stabilizer effectiveness remained unchanged as free-stream Mach number was increased from 0.30 to 0.70 but decreased with a further increase in free-stream Mach number.

2. The effectiveness of the aileron to produce a corresponding rolling moment for a negative aileron deflection was reduced to zero for angles of attack from approximately 1 to 9 deg at Mach number 0.80.

3. The rudder remained effective for all Mach numbers from 0.30 to 0.80.

4. Increasing the deflection angle of the speed brakes produced a destabilizing pitching moment and delayed the onset of wing buffet.

5. Minimum drag was increased by factors of approximately 100 and 600 percent for speed brake deflection angles of 20 and 60 deg, respectively, at Mach numbers from 0.70 to 0.80.

6. The horizontal stabilizer was 20 to 50 percent more effective in pitching moment per deg of deflection than the elevator.

APPENDIXES
I. ILLUSTRATIONS
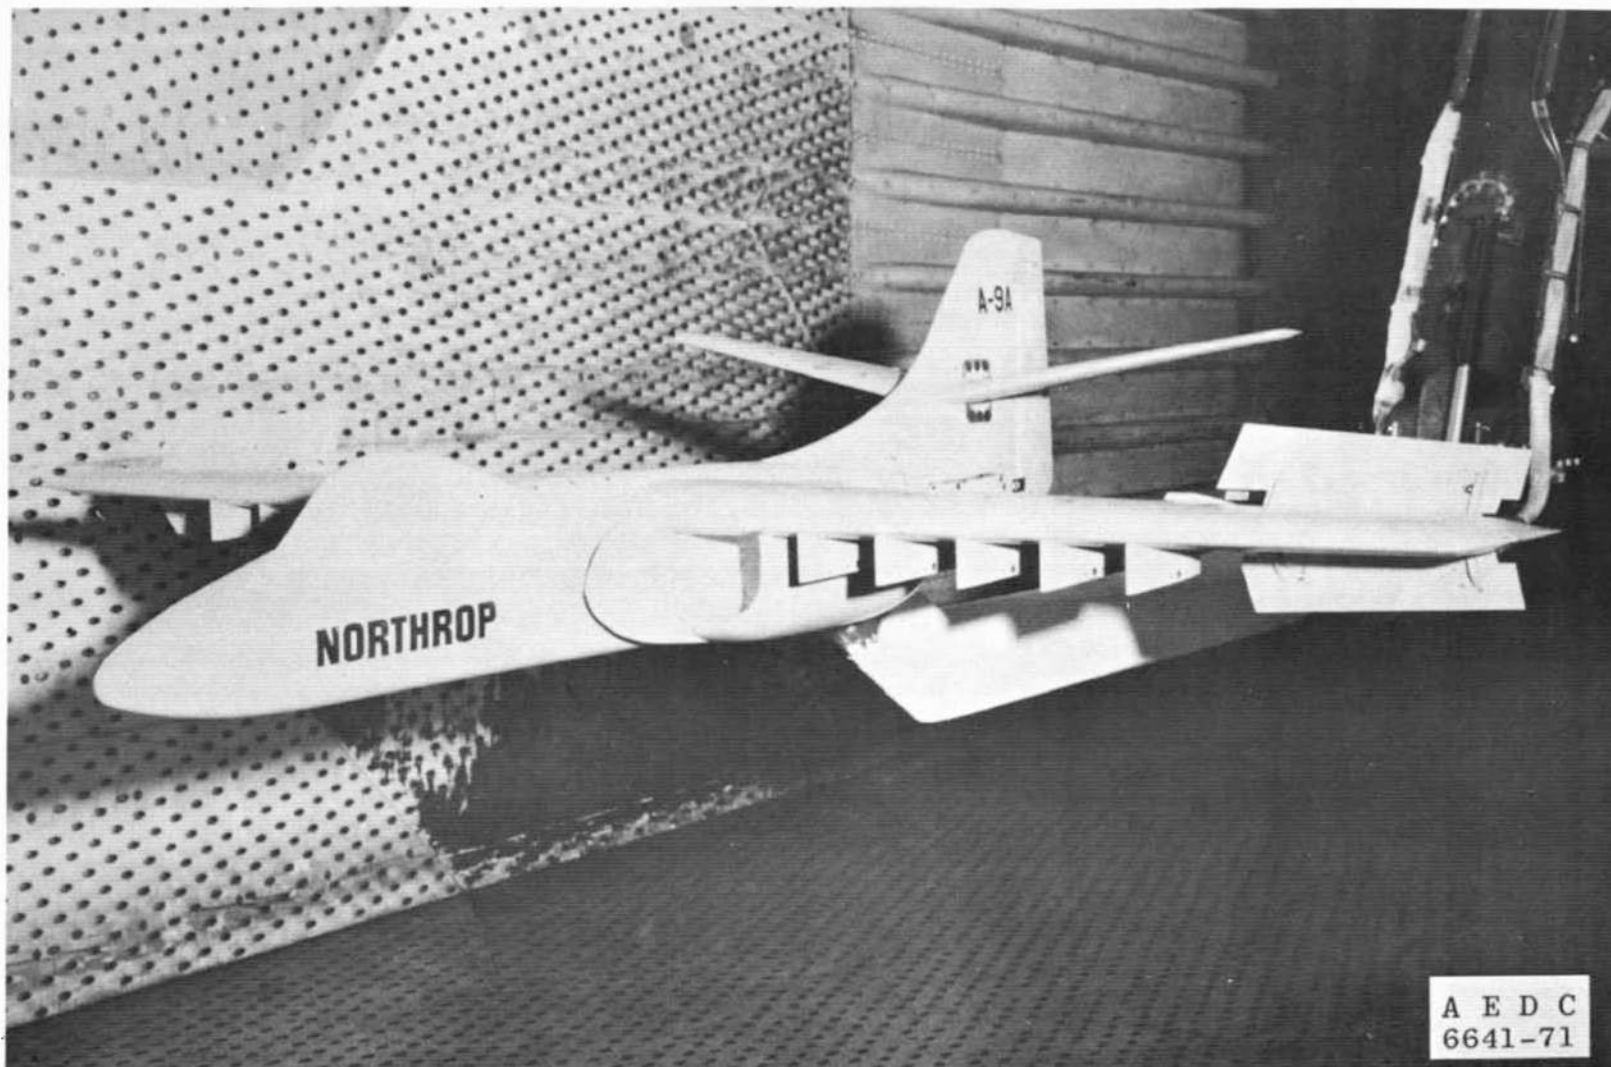II. TABLES

17°

17°

A

A

TYPICAL PERFORATED WALL PATTERN

FLOW

60°
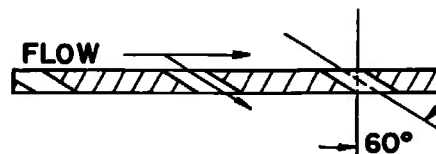
Section A-A

6% Open Area
Hole Diameter = 0.75 In.
Plate Thickness = 0.75 In.

SOLID DIVERGED WALL SECTION
TO ALLEVIATE STRUT BLOCKAGE

MODEL SUPPORT
STRUT

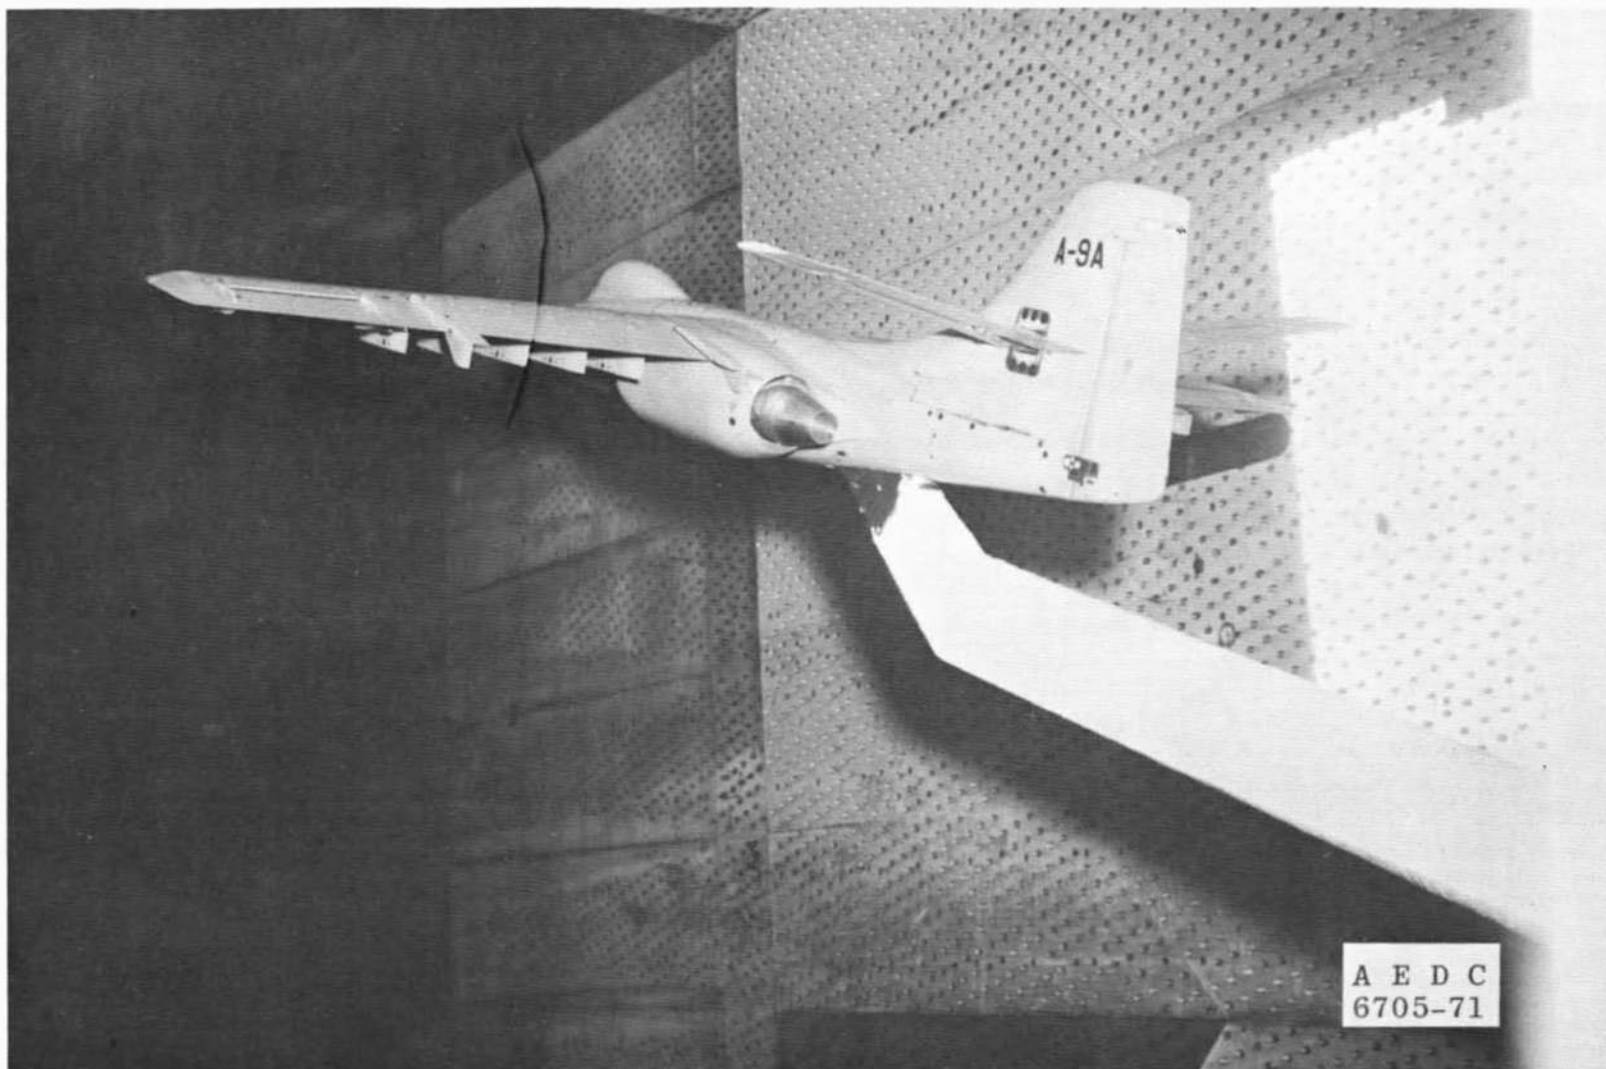SOLID AREA

PERFORATED WALLS

0.8

STA
-10

STA
0

STA.
9.2

STA.
28

STA.
40
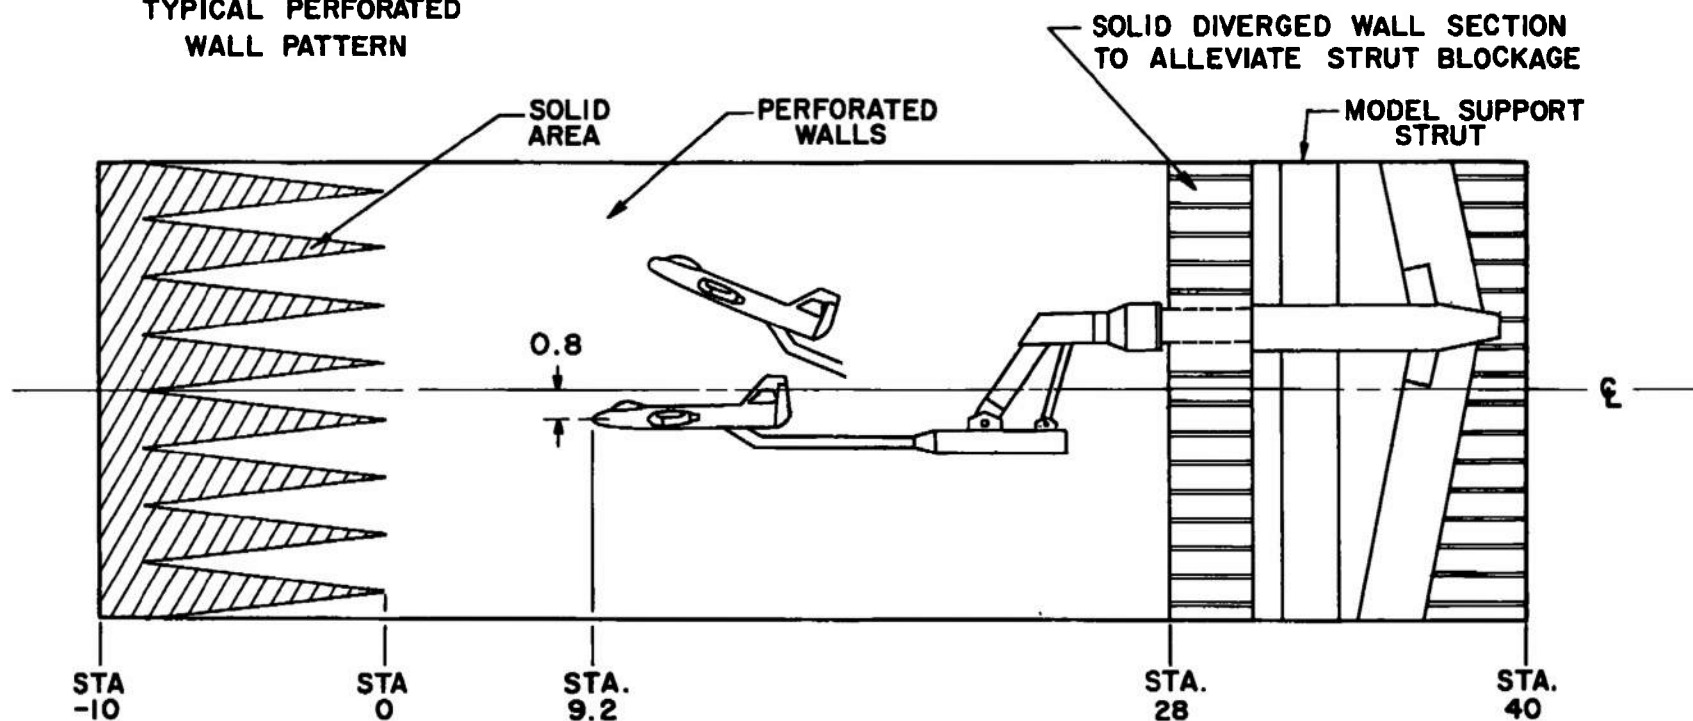
DIMENSIONS AND STATIONS IN FEET

Fig. 1 Schematic of Model Installation

9

a. Speed Brake Extended
Fig. 2 Photograph of Model Installation

b. Speed Brake Retracted
Fig. 2 Concluded

Fig. 3 Model Sketch

B.L.
41.04

B.L.
18.82

B.L.
0.00

4.10

L.E.

1.83

2.64

25% CHORD

0.25 Z̄ = 2.50

4.44

44.70 F.S.

6.02

57% CHORD

14.46
(MAC)

10.12

49.32 F.S.

10.56
(TIP CHORD)

90°

17.76
(ROOT CHORD)

T.E.
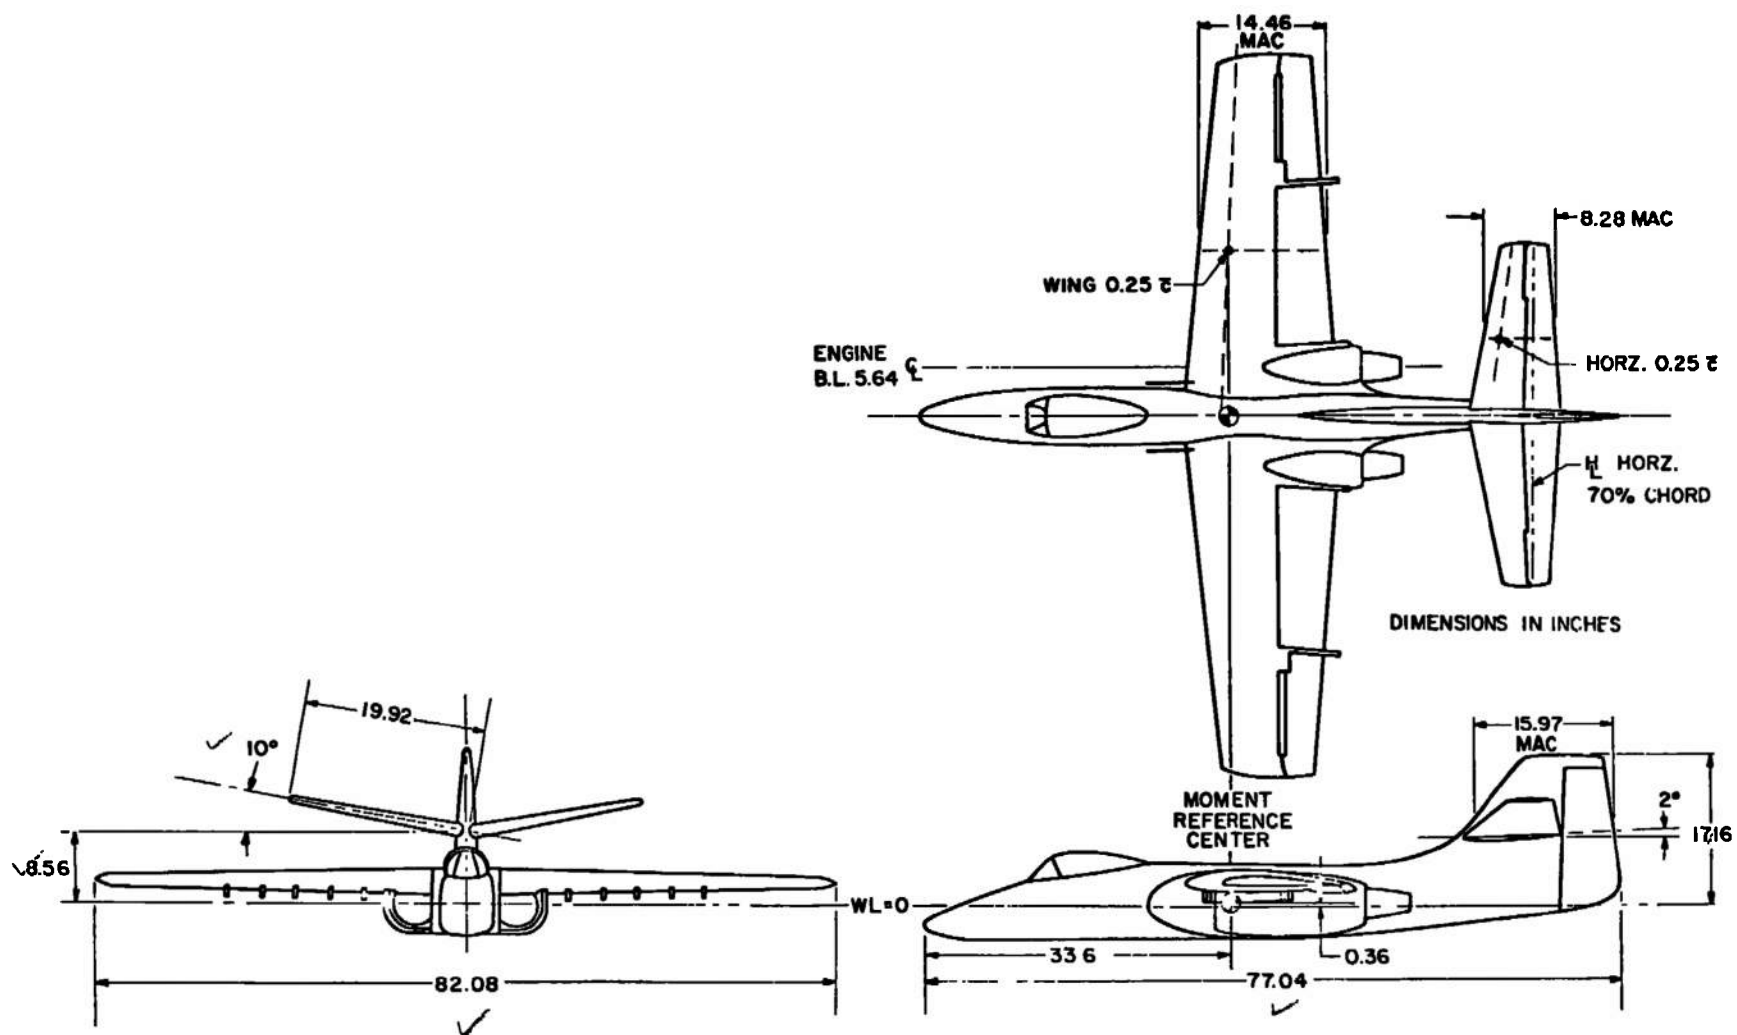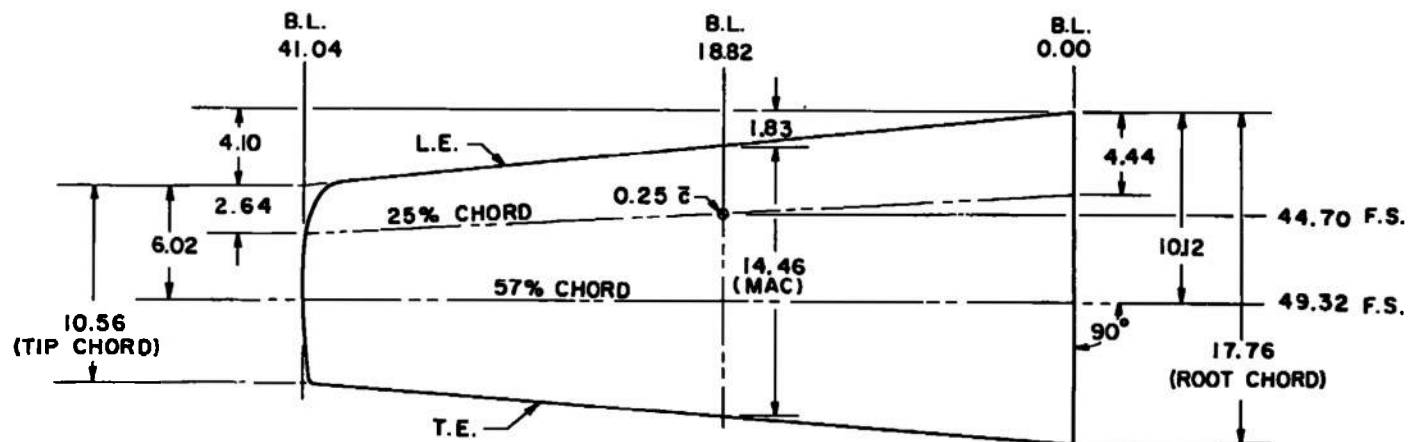
DIMENSIONS IN INCHES

a. Wing
Fig. 4 Dimensional Sketches of Model Components
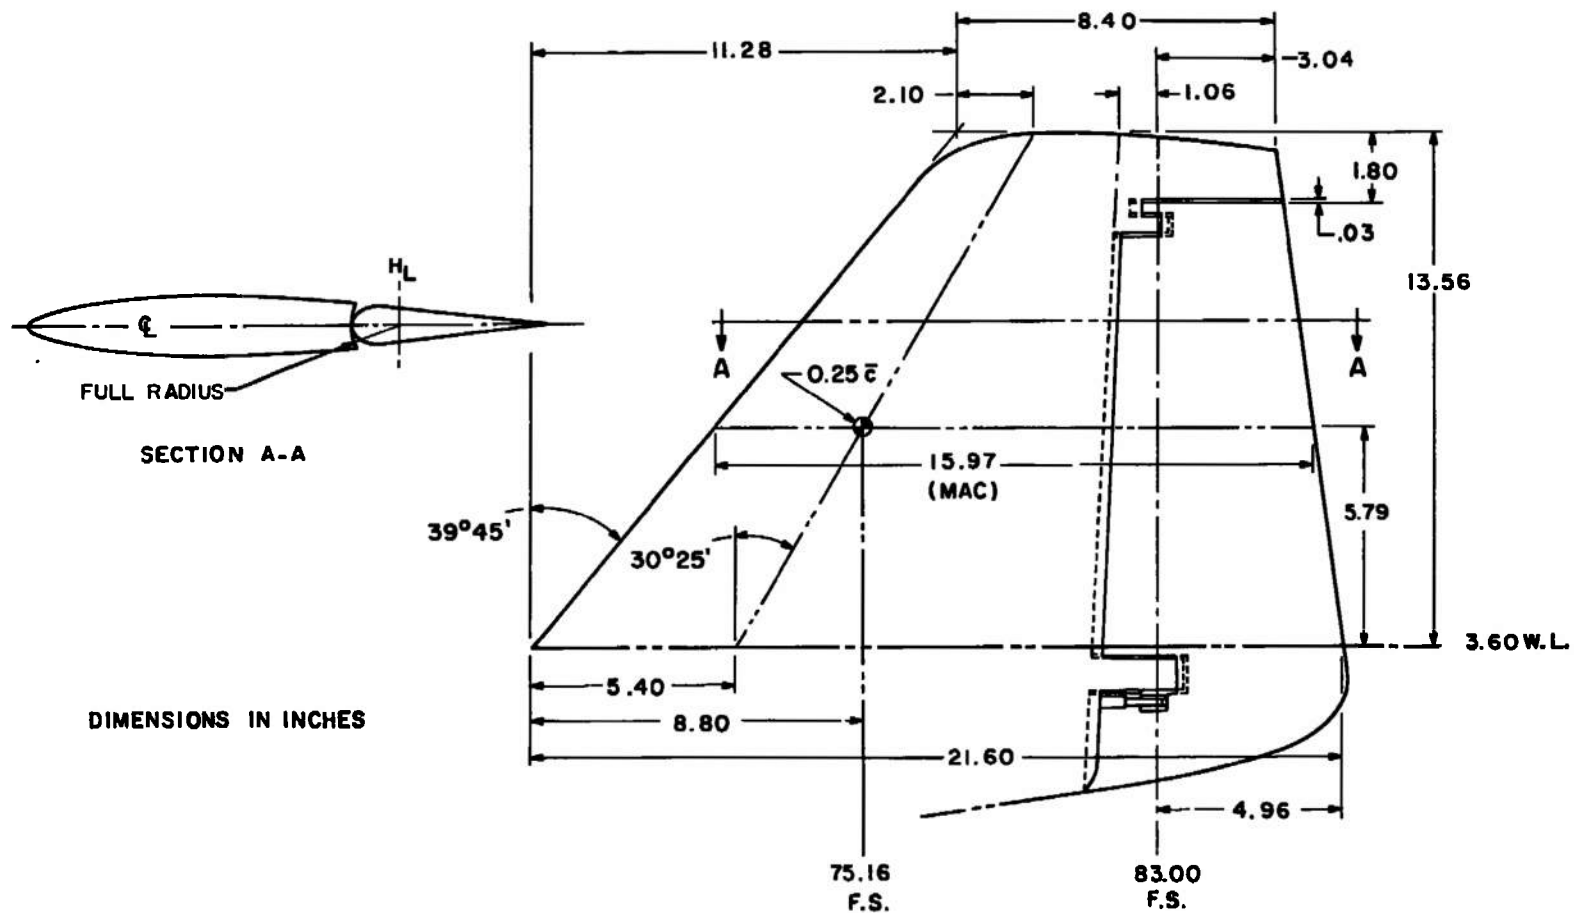
b. Vertical Tail
Fig. 4 Continued

VERTICAL L.E.

54.75
F.S.

B

A

A

B

UPPER F.S.

FUSELAGE-DORSAL
INTERSECTION

SECTION A-A   SECTION B-B
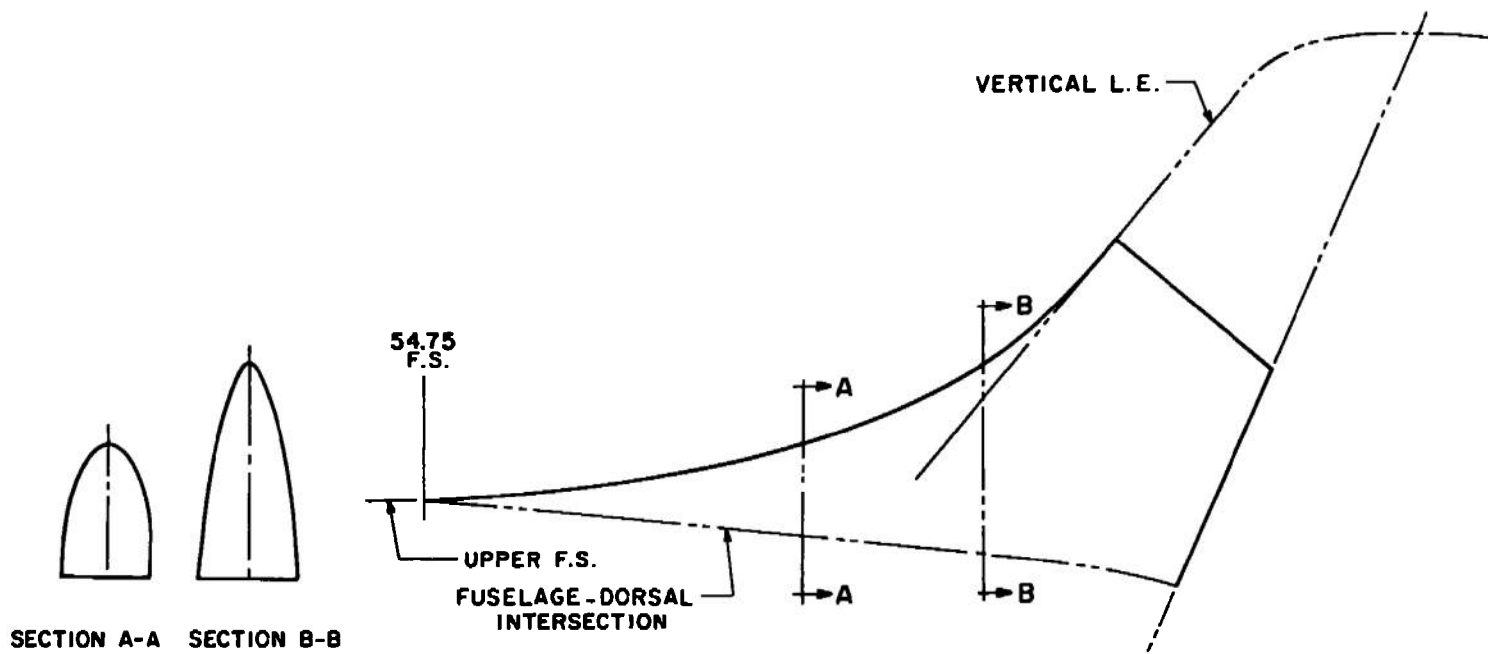
DIMENSIONS IN INCHES

c. Dorsal Fin
Fig. 4 Continued

B.L. 19.92

B.L. 15.94

B.L. 8.84

B.L. 0.00

3.78

A

3.75

2.67

HORZ. STAB. PIVOT PT. AT 50% CHORD

.60

74.69 F.S.

1.32

0.25 $\bar{c}$

8.28 (MAC)

58% CHORD

76.28 F.S.

5.28 TIP CHORD

78.42 F.S.

.62

1.27

52% CHORD

90°

ELEVATOR L.E.

10.68 ROOT CHORD

A

ELEVATOR H.L. 70% E.L.

FULL RADIUS

70% CHORD, H.L.

SECTION A-A

10°

75.47 W.L. (AT 50% CHORD)
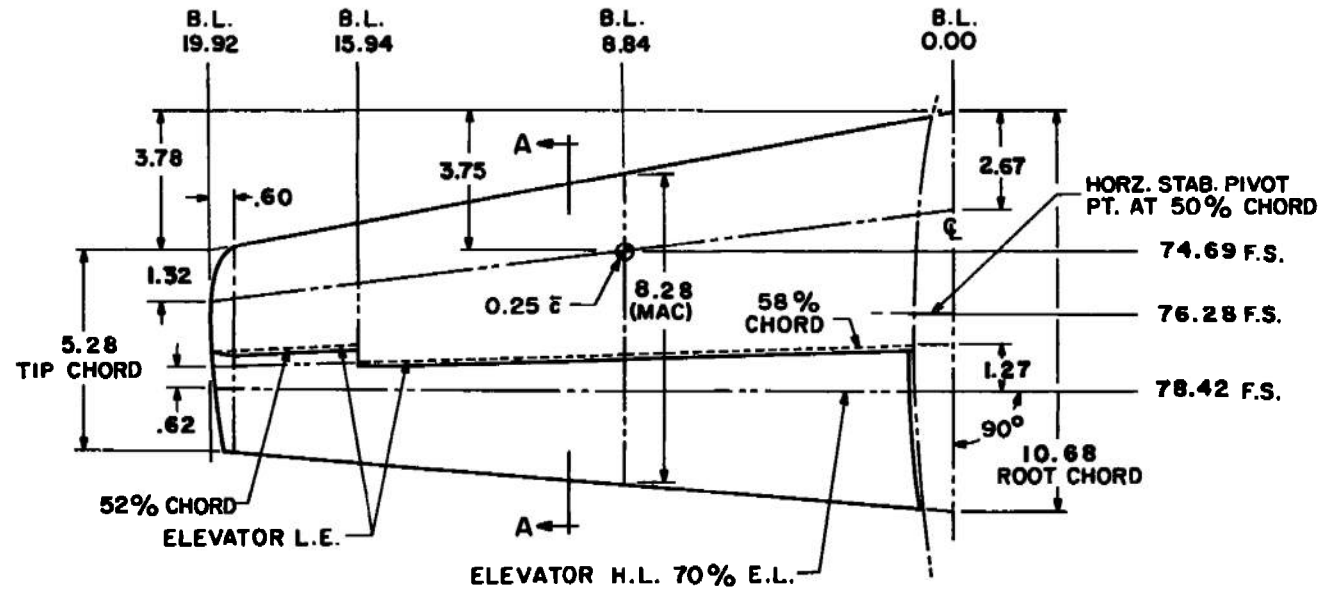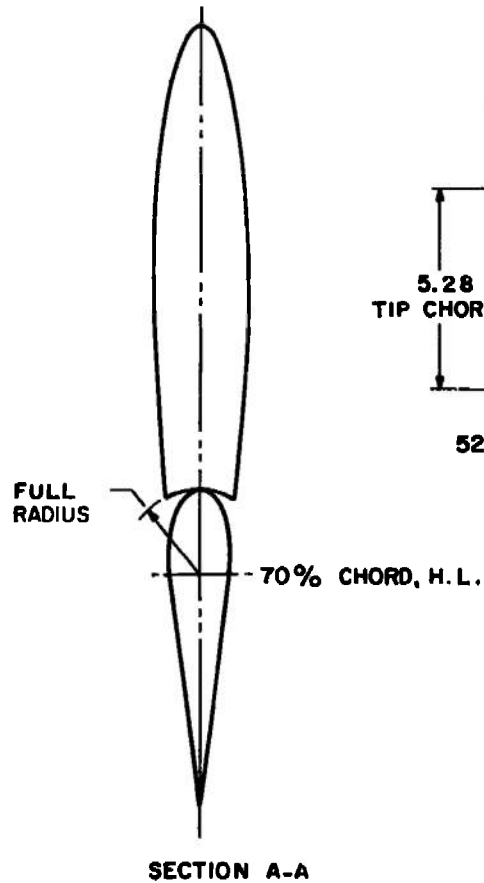
DIMENSIONS IN INCHES

d. Horizontal Tail
Fig. 4 Continued

DIMENSIONS IN INCHES

e. Wing Pylon Locations
Fig. 4 Continued
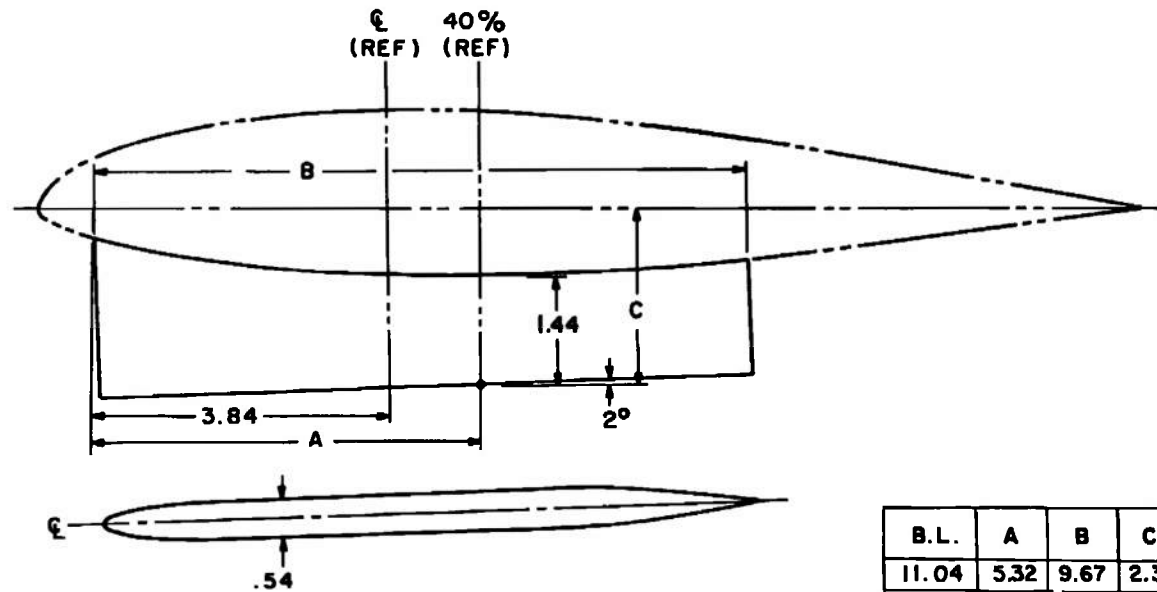
B.L.	A	B	C
11.04	5.32	9.67	2.38
14.88	5.31	9.13	2.34
18.72	5.06	8.60	2.30
22.56	4.92	8.09	2.26
26.40	4.79	7.52	2.22
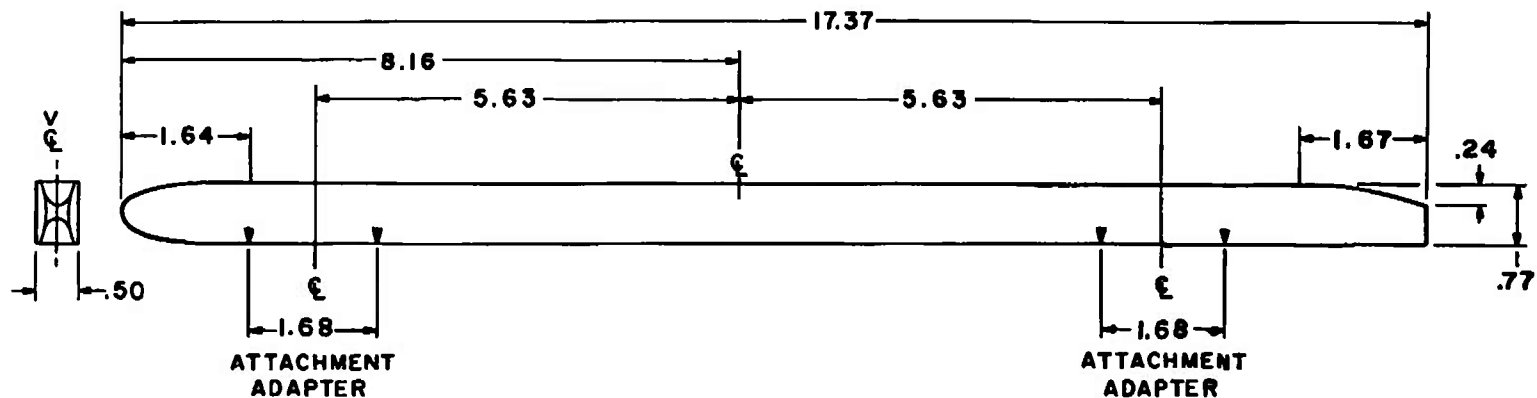
DIMENSIONS IN INCHES

f. Pylon Extension Rack
Fig. 4 Continued

15.59

7.80

3.83

1.68 ATTACHMENT ADAPTER

2.22 DIA.

.25

.12

.19

7.92
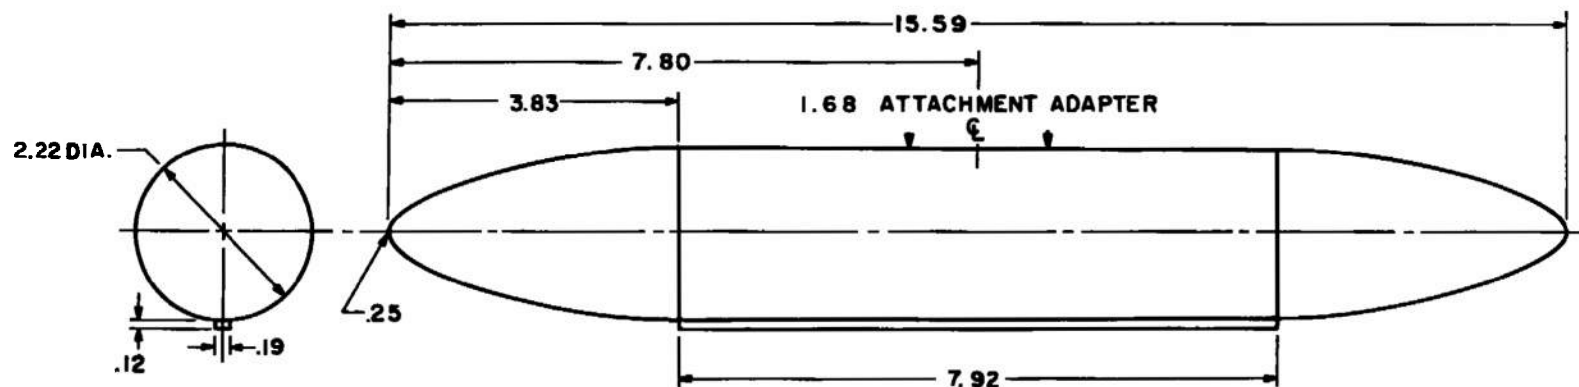
DIMENSIONS IN INCHES

g. BLU-1/B
Fig. 4 Continued

1.29 D

1.80

4.05

1.68 ATTACHMENT ADAPTER

℄

1.79

.95

.28

.59 D

.48 D

.35 D

.62 D

.51

10.36

.07

DIMENSIONS IN INCHES

h. MK-82

Fig. 4 Concluded

a. $M_\infty = 0.30$
Fig. 5 Effect of Tail Components

a. Concluded
Fig. 5 Continued

CONFIGURATION: $W_3 e_3 b_4 h_6 H_6 B_3 C_2 N_3$

SYM	CONFIGURATION +	M_∞	Re	BETA	δH	δE	δR	δAL	δB	PN
+	$D_6 S_{1-5}$	0.60	4.5	0				0	0	431
X	$D_6 S_{1-5} V_2 d_2 r_3$	0.60	4.5	0			0	0	0	341
⊙	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$	0.60	4.5	0	-2	0	0	0	0	50

b. $M_\infty = 0.60$
Fig. 5 Continued

b. Concluded
Fig. 5 Continued

CONFIGURATION: $H_{13} e_3 b_4 h_6 h_8 B_3 C_2 N_9$

SYM	CONFIGURATION	M_∞	Re	BETA	δH	δE	δR	XE	δR	PN
◆	$D_6 S_{1.5}$	0.70	4.5	0	—	—	—	0	0	438
✕	$D_6 S_{1.5} V_2 d_2 r_3$	0.70	4.5	0	—	—	0	0	0	543
⊙	$D_6 S_{1.5} V_2 d_2 r_3 H_9 e_3$	0.70	4.5	0	-2	0	0	0	0	5?

c. $M_\infty = 0.70$

Fig. 5 Continued

c. Concluded
Fig. 5 Continued

d. $M_\infty = 0.75$

Fig. 5 Continued

d. Concluded
Fig. 5 Continued

29

e. $M_\infty = 0.80$

Fig. 5 Continued

e. Concluded
Fig. 5 Concluded

a. $M_\infty = 0.30$

Fig. 6 Stabilizer Effectiveness

a. Continued
Fig. 6 Continued

CONFIGURATION: $W_3 e_3 b_4 h_8 h_9 B_3 C_2 N_3$

SYM	CONFIGURATION	M_∞	R_e	BETB	δH	δE	δR	δAL	δB	PN
X	$D_6 S_{1-5} V_2 d_2 r_3$	0.90	2.30	0.0	+	-	0	0	0	337
⊕	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$	0.30	2.30	0.0	-2	0	0	0	0	46
▣	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$	0.90	2.30	0.0	0	0	0	0	0	327
△	$D_6 S_{1-3} V_2 d_2 r_3 H_3 e_3$	0.90	2.30	0.0	+2	0	0	0	0	319
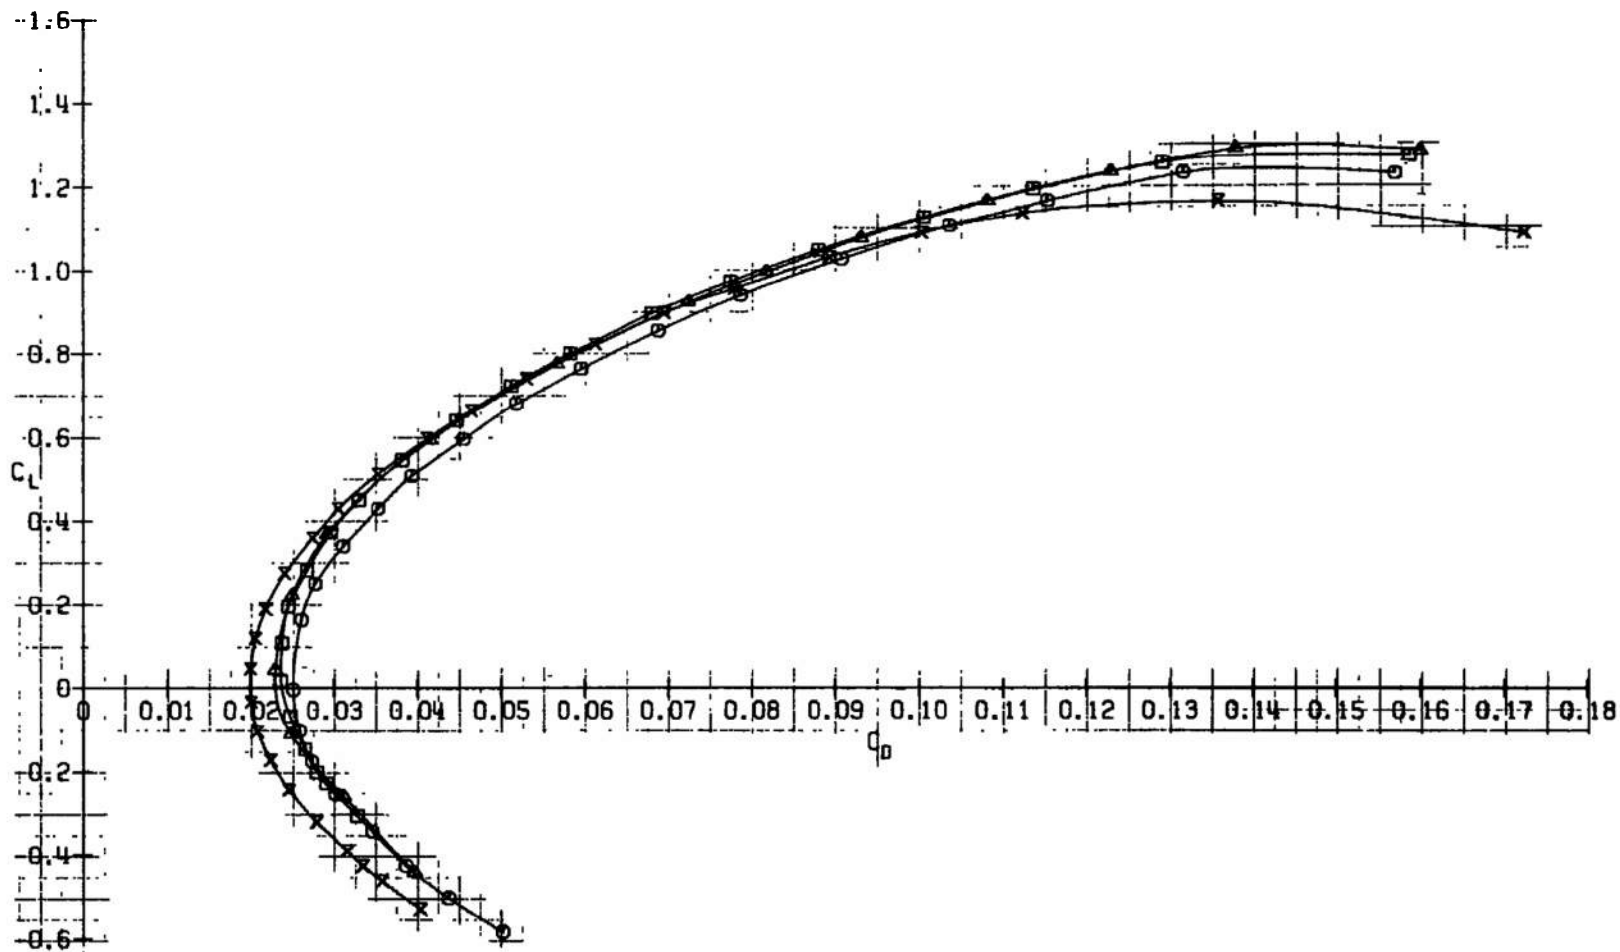
a. Concluded

Fig. 6 Continued
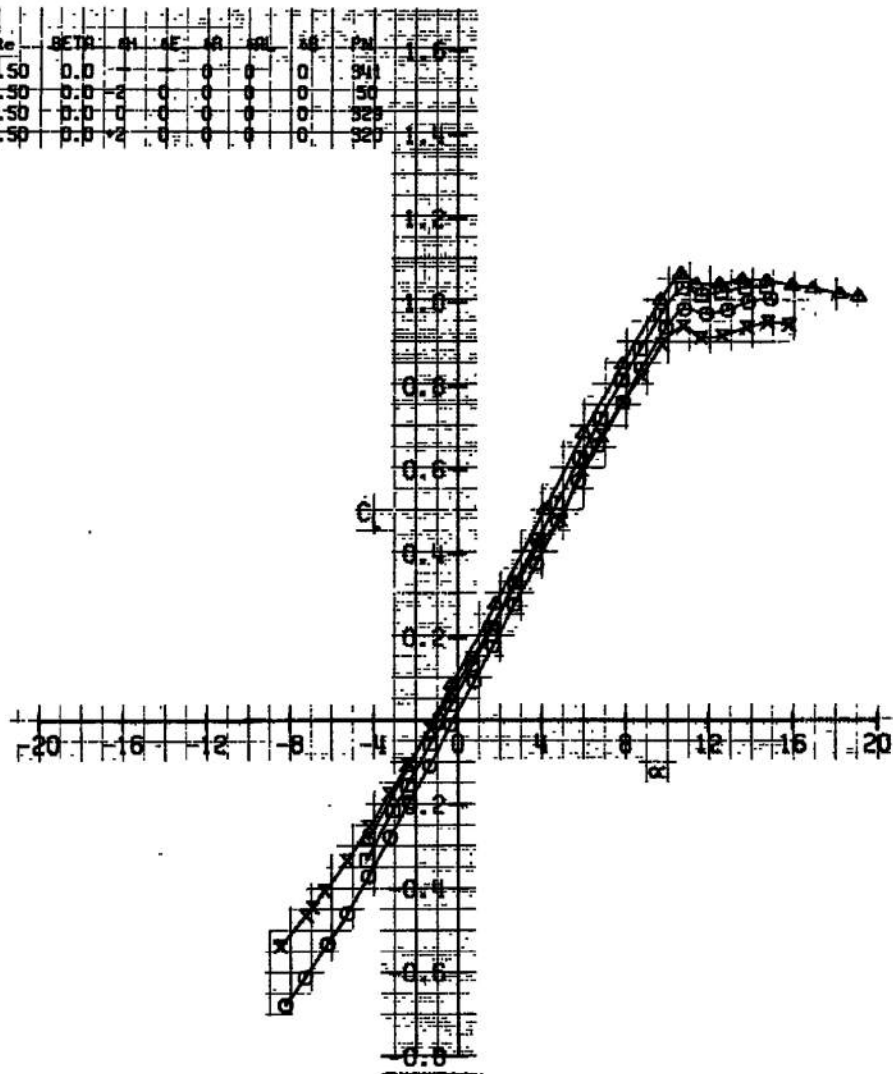
b. $M_\infty = 0.60$
Fig. 6 Continued

CONFIGURATION: $H_3 e_3 b_4 h_6 l_6 B_3 C_2 N_3$

SYM	CONFIGURATION	M_∞	Re	BETA	Δi	ΔE	ΔR	ΔL	ΔB	PN
X	$D_6 S_{15} V_2 d_2 r_3$	0.60	4.50	0.0			0	0	0	341
⊙	$D_6 S_{15} V_2 d_2 r_3 H_3 e_3$	0.60	4.50	0.0	-2	0	0	0	0	50
▣	$D_6 S_{15} V_2 d_2 r_3 H_3 e_3$	0.60	4.50	0.0	0	0	0	0	0	329
△	$D_6 S_{15} V_2 d_2 r_3 H_3 e_3$	0.60	4.50	0.0	2	0	0	0	0	320
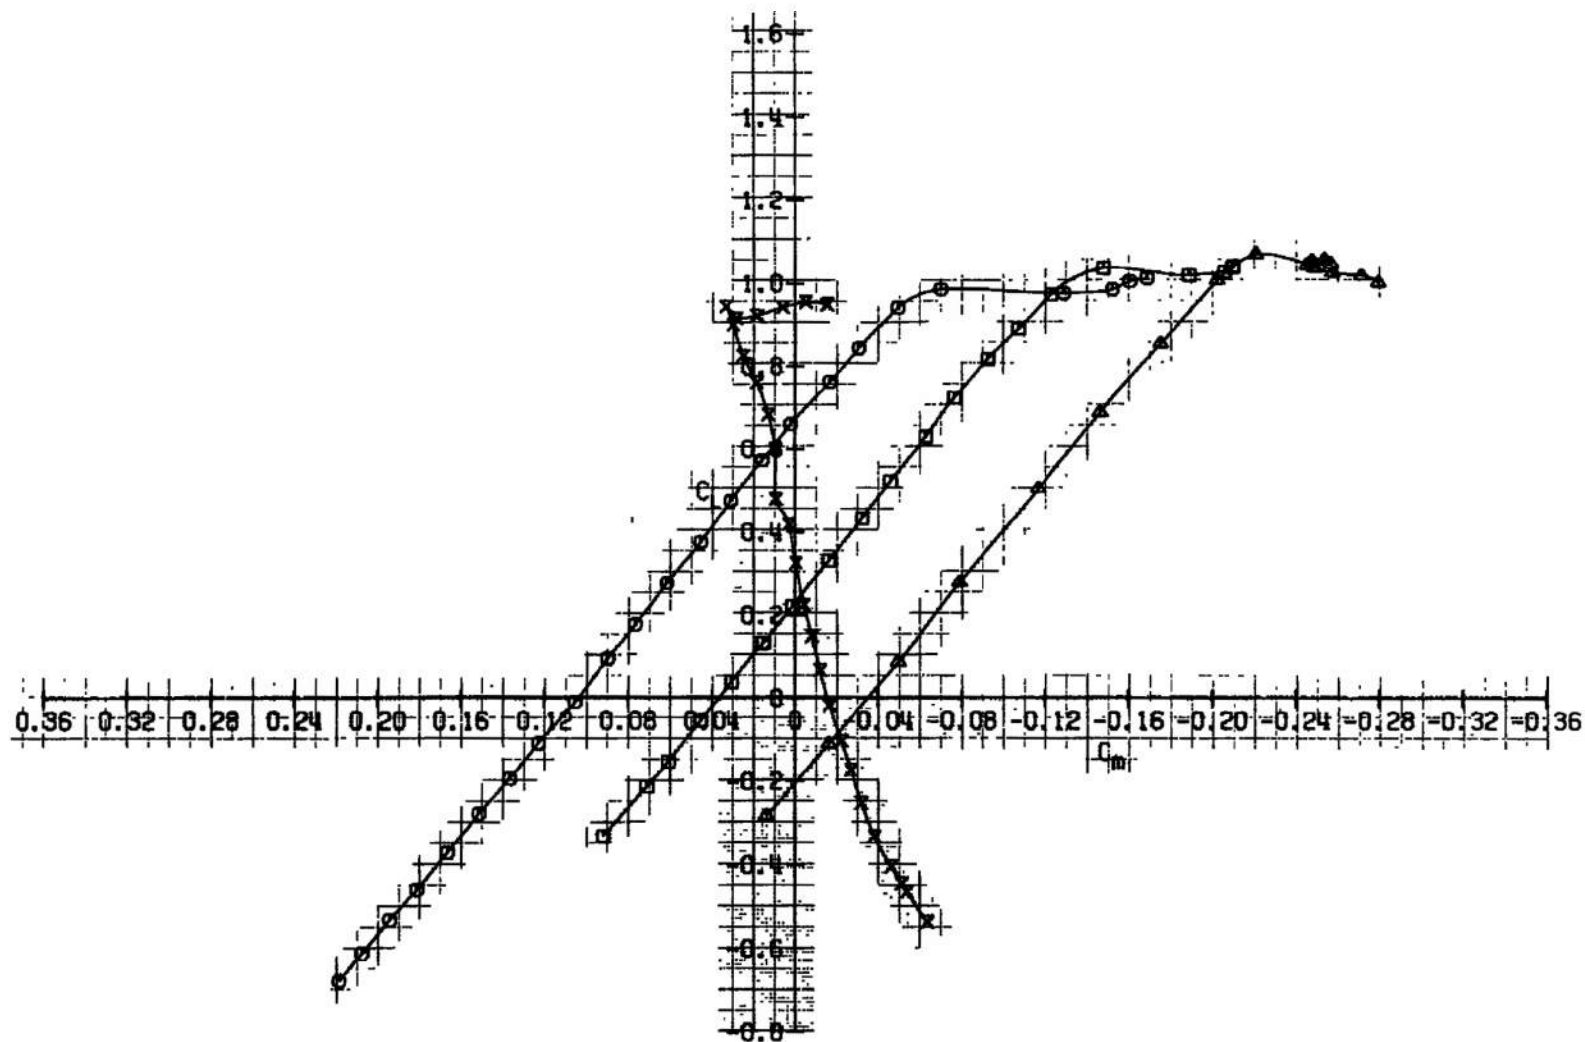
b. Continued

Fig. 6 Continued
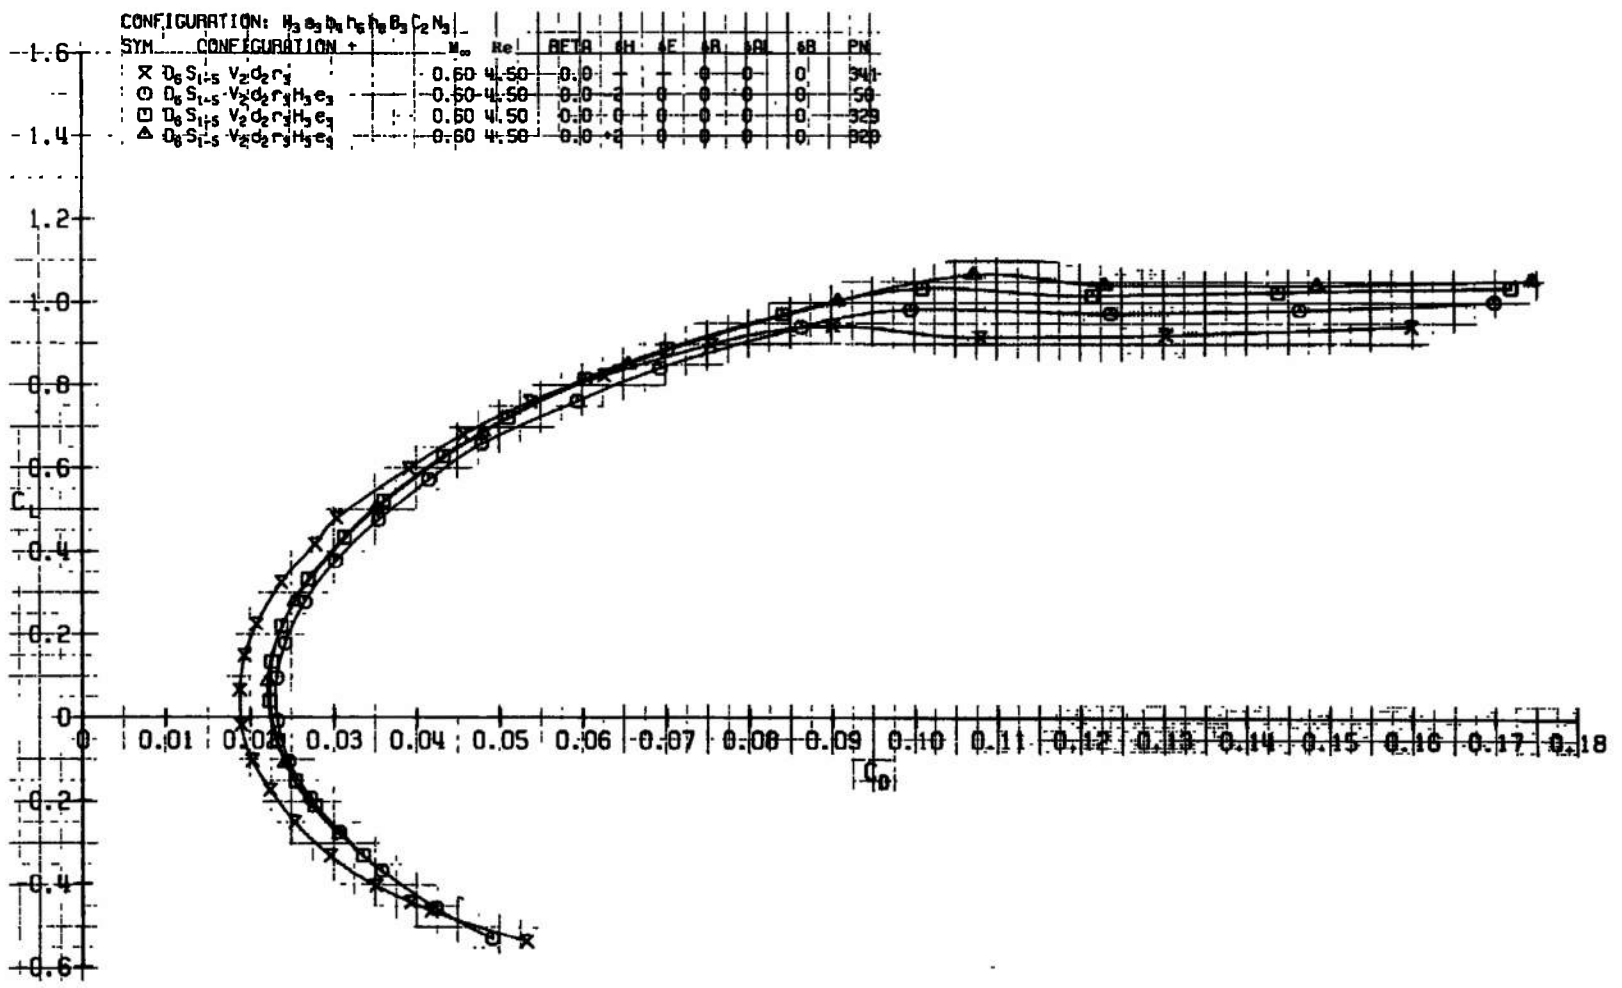
b. Concluded
Fig. 6 Continued

c. $M_\infty = 0.70$

Fig. 6 Continued

c. Continued
Fig. 6 Continued

CONFIGURATION: $H_3 B_3 U_4 h_5 D_8 B_3 C_2 N_3$

SYM	CONFIGURATION	M_∞	Re	BETA	6H	4F	6R	6RL	6B	P.N.
X	$D_5 S_{1.5} V_2 d_2 r_3$	0.70	4.50	0.0			0	0	0	343
⊙	$D_8 S_{1.5} V_2 d_2 r_3 H_3 e_3$	0.70	4.50	0.0 -2	0	0	0	0	0	52
□	$D_8 S_{1.5} V_2 d_2 r_3 H_3 e_3$	0.70	4.50	0.10	0	0	0	0	0	330
△	$B_8 S_{1.5} V_2 d_2 r_3 H_3 e_3$	0.70	4.50	0.0 -2	0	0	0	0	0	321

c. Concluded
Fig. 6 Continued

CONFIGURATION: $W_3 e_3 b_4 n_6 h_8 B_3 C_2 N_3$

SYM	CONFIGURATION +	M_∞	Re	BETA	ΔH	ΔE	δR	ΔAL	ΔB	PN
X	$D_6 S_{1-5} V_2 d_2 r_3$	0.75	4.50	0.0	—	—	0	0	0	345
⊙	$B_6 S_{1-5} V_2 d_2 r_3 H_3 c_3$	0.75	4.50	0.0	-2	0	0	0	0	54
▢	$D_6 S_{1-6} V_2 d_2 r_3 H_3 e_3$	0.75	4.50	0.0	0	0	0	0	0	931
△	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$	0.75	4.50	0.0	+2	0	0	0	0	922

d. $M_\infty = 0.75$
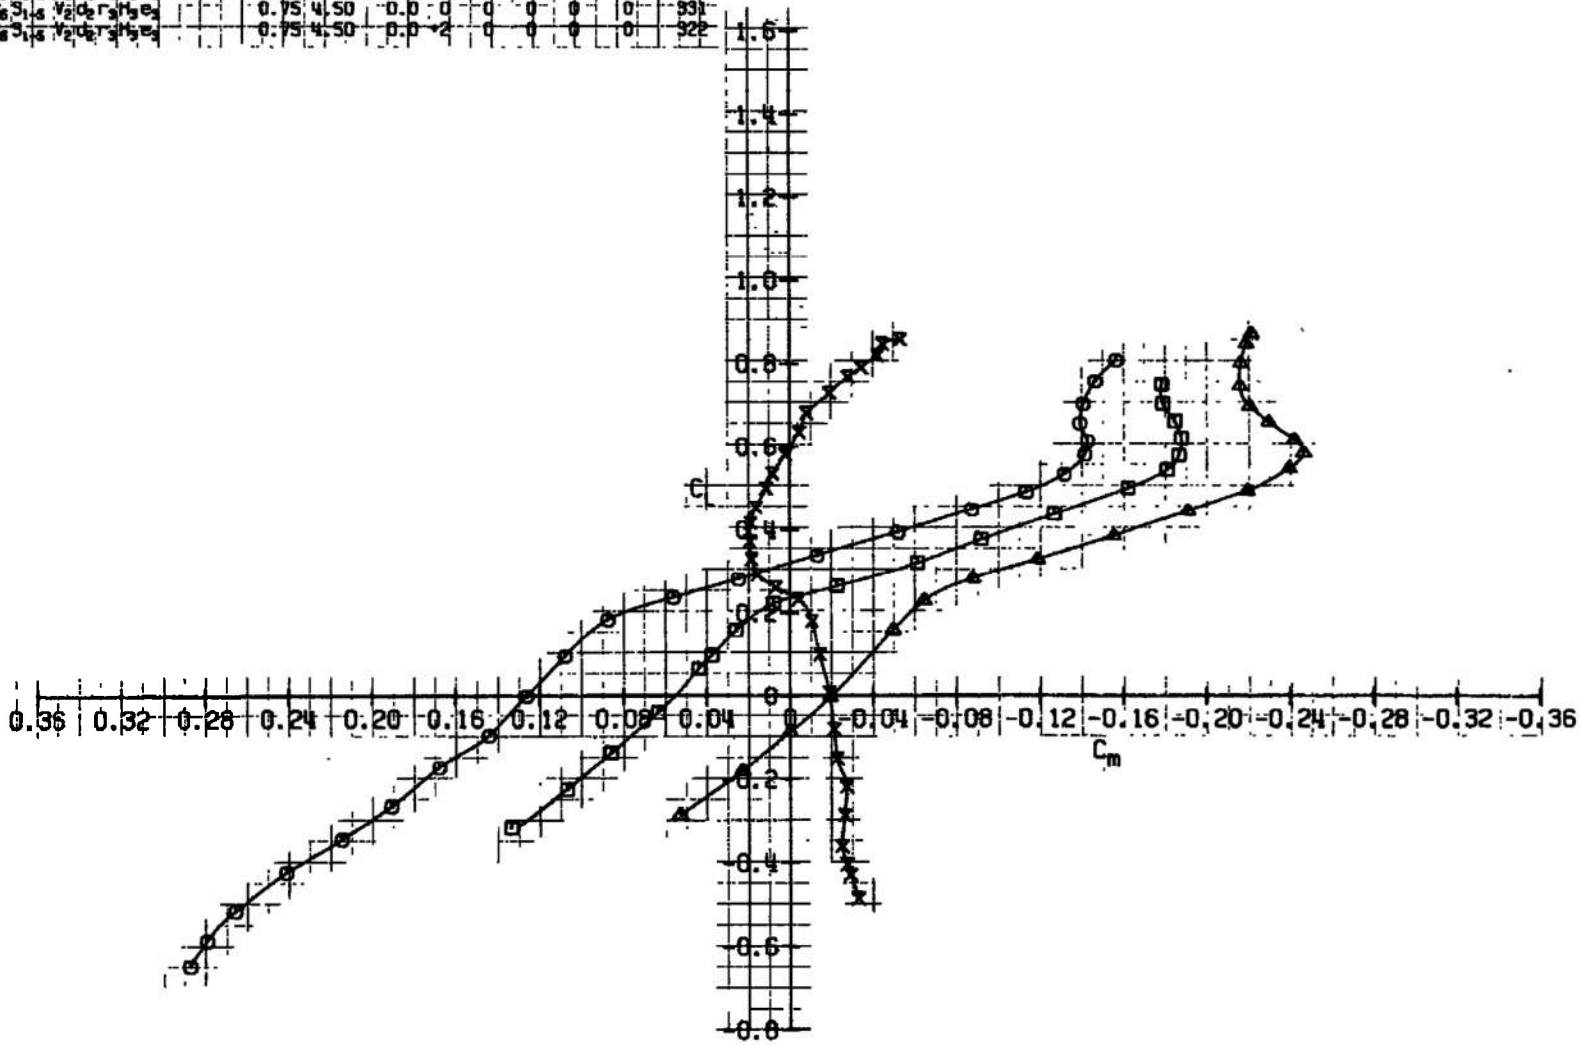
Fig. 6 Continued

d. Continued
Fig. 6 Continued
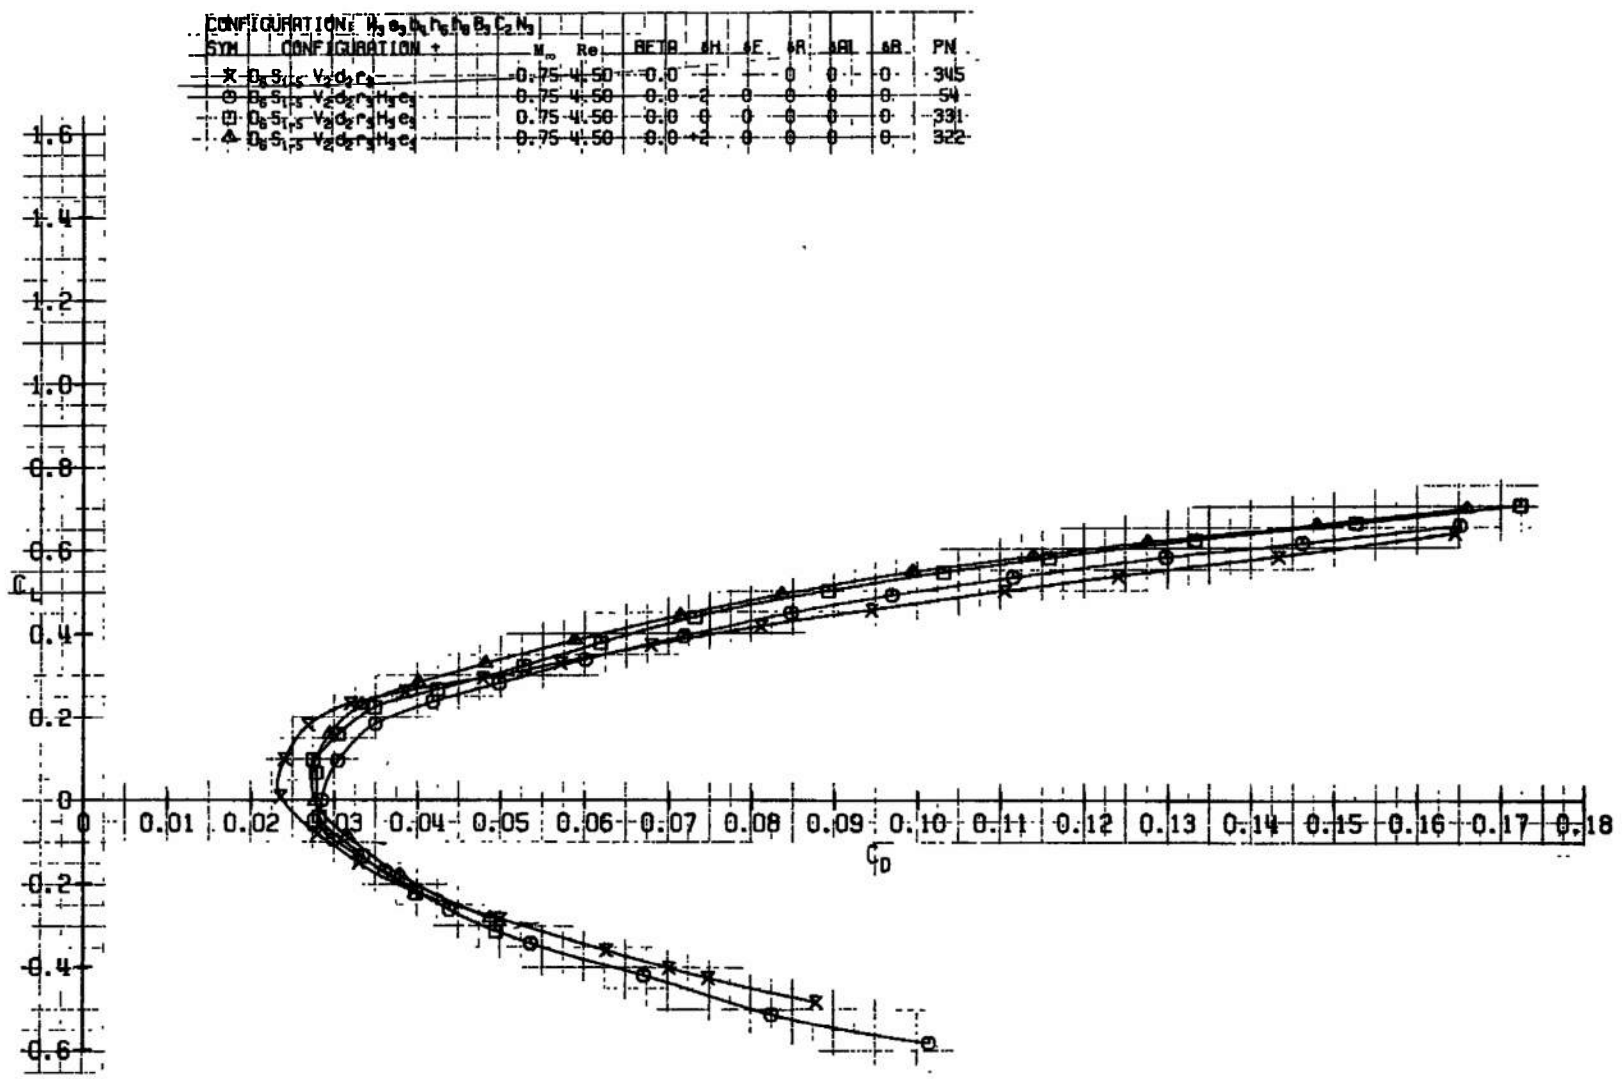
d. Concluded
Fig. 6 Continued

CONFIGURATION: $W_3 a_3 b_4 h_3 h_9 B_3 C_2 N_3$

SYM	CONFIGURATION	M_∞	Re	BETA	aH	aE	aB	aOL	aB	PN
X	$D_8 S_{15} V_2 d_2 r_3$	0.80	4.50	0.0	—	—	0	0	0	347
⊙	$D_8 S_{15} V_2 d_2 r_3 H_3 e_3$	0.80	4.50	0.0	-2	0	0	0	0	56
▣	$D_8 S_{15} V_2 d_2 r_3 H_3 e_3$	0.80	4.50	0.0	0	0	0	0	0	332
△	$D_8 S_{15} V_2 d_2 r_3 H_3 e_3$	0.80	4.50	0.0	2	0	0	0	0	320

e. $M_\infty = 0.80$
Fig. 6 Continued

44

CONFIGURATION: $H_3 e_3 b_4 h_6 h_6 B_3 C_2 N_3$

SYM	CONFIGURATION	M_∞	Re	BETA	δH	δE	δR	δAL	δB	PN
X	$D_6 S_{1-5} V_2 d_2 r_3$	0.80	4.50	0.0	—	—	0	0	0	347
⊙	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$	0.80	4.50	0.0	-2	0	0	0	0	56
□	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3'$	0.80	4.50	0.0	0	0	0	0	0	332
△	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3'$	0.80	4.50	0.0	2	0	0	0	0	329

e. Continued
Fig. 6 Continued

CONFIGURATION: $W_3 e_3 b_4 h_6 f_9 B_3 f_2 N_3$

SYM	CONFIGURATION +	M_∞	Rc	BETA	δH	δE	δR	δAL	δB	P.N.
X	$D_6 S_{1-6} V_2 d_2 r_3$	0.80	4.50	0.0	+	+	0	0	0	347
⊙	$I_3 S_{1-6} V_2 d_2 r_3 H_3 e_3$	0.80	4.50	0.0	-2	0	0	0	0	56
⊡	$I_5 S_{1-6} V_2 d_2 r_3 H_3 e_3$	0.80	4.50	0.0	0	0	0	0	0	332
△	$I_5 S_{1-6} V_2 d_2 r_3 H_3 e_3$	0.80	4.50	0.0	+2	0	0	0	0	323

C_L

C_D

e.   Concluded
Fig. 6 Concluded

CONFIGURATION: $W_3 e_3 b_4 h_6 h_8 B_3 C_2 N_3$

SYM	CONFIGURATION +		M_∞	Re	BETA	ΔH	ΔE	ΔR	ΔAL	ΔB	PN
X	$D_6 S_{1-5} V_2 d_2 r_3$		0.30	2.30	0.0	—	—	0	0	0	337
◇	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$		0.30	2.30	0.0	-2	+10	0	0	0	97
▽	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$		0.30	2.30	0.0	-2	+05	0	0	0	99
⊖	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$		0.30	2.30	0.0	-2	00	0	0	0	46
△	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$		0.30	2.30	0.0	-2	-05	0	0	0	100
□	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$		0.30	2.30	0.0	-2	-10	0	0	0	101

a. $M_\infty = 0.30$

Fig. 7 Elevator Effectiveness

a. Continued
Fig. 7 Continued

47

AEDC-TR-71-271

CONFIGURATION: $H_3 e_3 b_4 h_6 h_8 B_3 C_2 N_3$.

SYM	CONFIGURATION	M_∞	Re	BETA	δH	δE	δB	δBL	δB	PN
X	$D_6 S_{1-5} V_2 d_2 r_3$	0.30	2.30	0.0	—	+	0	0	0	337
◇	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$	0.30	2.30	0.0	-2	+10	0	0	0	97
▽	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$	0.30	2.30	0.0	-2	+05	0	0	0	99
⊙	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$	0.30	2.30	0.0	-2	-00	0	0	0	46
△	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$	0.30	2.30	0.0	-2	-05	0	0	0	100
▣	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$	0.30	2.30	0.0	-2	-10	0	0	0	101

a. Concluded

Fig. 7 Continued

48

CONFIGURATION: $H_3 B_3 U_4 \eta_5 h_9 B_3 C_2 N_3$

SYM	CONFIGURATION	M_∞	Re	BETA	ΔH	δE	δR	$\Delta \delta L$	δB	PN
⊼	$D_6 S_{1-5}$ $V_2 d_2 r_3$	0.60	4.50	0.0	—	—	0	0	0	341
◇	$D_6 S_{1-5}$ $V_2 d_2 r_3 h_9 e_3$	0.60	4.50	0.0	-2	+10	0	0	0	111
▽	$D_6 S_{1-5}$ $V_2 d_2 r_3 h_9 e_3$	0.60	4.50	0.0	-2	+05	0	0	0	112
⊙	$D_6 S_{1-5}$ $V_2 d_2 r_3 h_9 e_3$	0.60	4.50	0.0	-2	0	0	0	0	56
△	$D_6 S_{1-5}$ $V_2 d_2 r_3 h_9 e_3$	0.60	4.50	0.0	-2	-05	0	0	0	118
⊟	$D_6 S_{1-5}$ $V_2 d_2 r_3 h_9 e_3$	0.60	4.50	0.0	-2	-10	0	0	0	114

b. $M_\infty = 0.60$

Fig. 7 Continued

CONFIGURATION: $H_3 \theta_3 \theta_4 n_5 H_8 B_3 C_2 N_3$

SYM	CONFIGURATION	M_∞	Re	BETA	δH	δE	δR	δRL	δB	PN
✕	$D_6 S_{1+5} V_2 d_2 r_3$	0.60	4.50	0.0	—	—	0	—	0	341
◇	$D_6 S_{1+5} V_2 d_2 r_3 H_3 e_3$	0.60	4.50	0.0	-2	+10	0	0	0	111
▽	$D_6 S_{1+5} V_2 d_2 r_3 H_3 e_3$	0.60	4.50	0.0	-2	+05	0	0	0	112
⊕	$D_6 S_{1+5} V_2 d_2 r_3 H_3 e_3$	0.60	4.50	0.0	-2	0	0	0	0	50
△	$D_6 S_{1+5} V_2 d_2 r_3 H_3 e_3$	0.60	4.50	0.0	-2	-05	0	0	0	113
☐	$D_6 S_{1+5} V_2 d_2 r_3 H_3 e_3$	0.60	4.50	0.0	-2	-10	0	0	0	114

b. Continued

Fig. 7 Continued

b. Concluded
Fig. 7 Continued

CONFIGURATION: $W_3 e_3 b_4 h_6 n_9 B_3 C_2 N_3$

SYM	CONFIGURATION + _	M_∞	Rc	BETA	&H	&E	AR	ARL	&B	PN
X	$D_6 S_{1-5} V_2 d_2 r_3$	0.70	4.50	0.0	+	+	0	0	0	348
◇	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$	0.70	4.50	0.0	-2	+10	0	0	0	120
▽	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$	0.70	4.50	0.0	-2	+05	0	0	0	118
◉	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$	0.70	4.50	0.0	-2	0	0	0	0	52
△	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$	0.70	4.50	0.0	-2	-05	0	0	0	117
⊟	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$	0.70	4.50	0.0	-2	-10	0	0	0	118

c. $M_\infty = 0.70$

Fig. 7 Continued

c. Continued
Fig. 7 Continued

SYM	CONFIGURATION	M_∞	Rc	BETA	ΔH	δE	δR	ΔAL	δB	PN
X	$D_8 S_{LS} V_d d_2 r_3$	0.70	4.50	0.0	—	—	0	0	0	343
⟡	$D_8 S_{LS} V_d d_2 r_3 H_3 e_3$	0.70	4.50	0.0	-2	+10	0	0	0	120
▽	$D_8 S_{LS} V_d d_2 r_3 H_3 e_3$	0.70	4.50	0.0	-2	+05	0	0	0	118
⊙	$D_8 S_{LS} V_d d_2 r_3 H_3 e_3$	0.70	4.50	0.0	-2	0	0	0	0	52
△	$D_8 S_{LS} V_d d_2 r_3 H_3 e_3$	0.70	4.50	0.0	-2	-05	0	0	0	117
⊟	$D_8 S_{LS} V_d d_2 r_3 H_3 e_3$	0.70	4.50	0.0	-2	-10	0	0	0	116

CONFIGURATION: $N_3 B_3 D_4 H_5 D_8 B_3 C_2 N_3$

c. Concluded

Fig. 7 Continued

CONFIGURATION: $W_3 B_3 D_4 N_6 H_8 B_9 C_2 N_3$									
SYM	CONFIGURATION φ	M_∞	Re	BETA	ΔH	δE	δR	$\delta A I L$	δR	PN
✳	$D_5 S_{1.5} V_2 \delta_2 \Gamma_5$	0.75	4.50	0.0	-2	0	0	0	0	345
◇	$D_5 S_{1.5} V_2 \delta_5 \Gamma_5 H_4 e_5$	0.75	4.5	0.0	-2	+10	0	0	0	122
▽	$D_5 S_{1.5} V_2 \delta_5 \Gamma_5 H_4 e_5$	0.75	4.5	0.0	-2	+05	0	0	0	124
⬭	$D_5 S_{1.5} V_2 \delta_5 \Gamma_5 H_4 e_5$	0.75	4.5	0.0	-2	0	0	0	0	54
△	$D_5 S_{1.5} V_2 \delta_5 \Gamma_5 H_4 e_5$	0.75	4.5	0.0	-2	-05	0	0	0	123
⊟	$D_5 S_{1.5} V_2 \delta_5 \Gamma_5 H_4 e_5$	0.75	4.5	0.0	-2	-10	0	0	0	125

d. $M_\infty = 0.75$

Fig. 7 Continued

d. Continued
Fig. 7 Continued

d. Concluded
Fig. 7 Continued

e. $M_\infty = 0.80$
Fig. 7 Continued

e. Continued
Fig. 7 Continued

e. Concluded

Fig. 7 Concluded
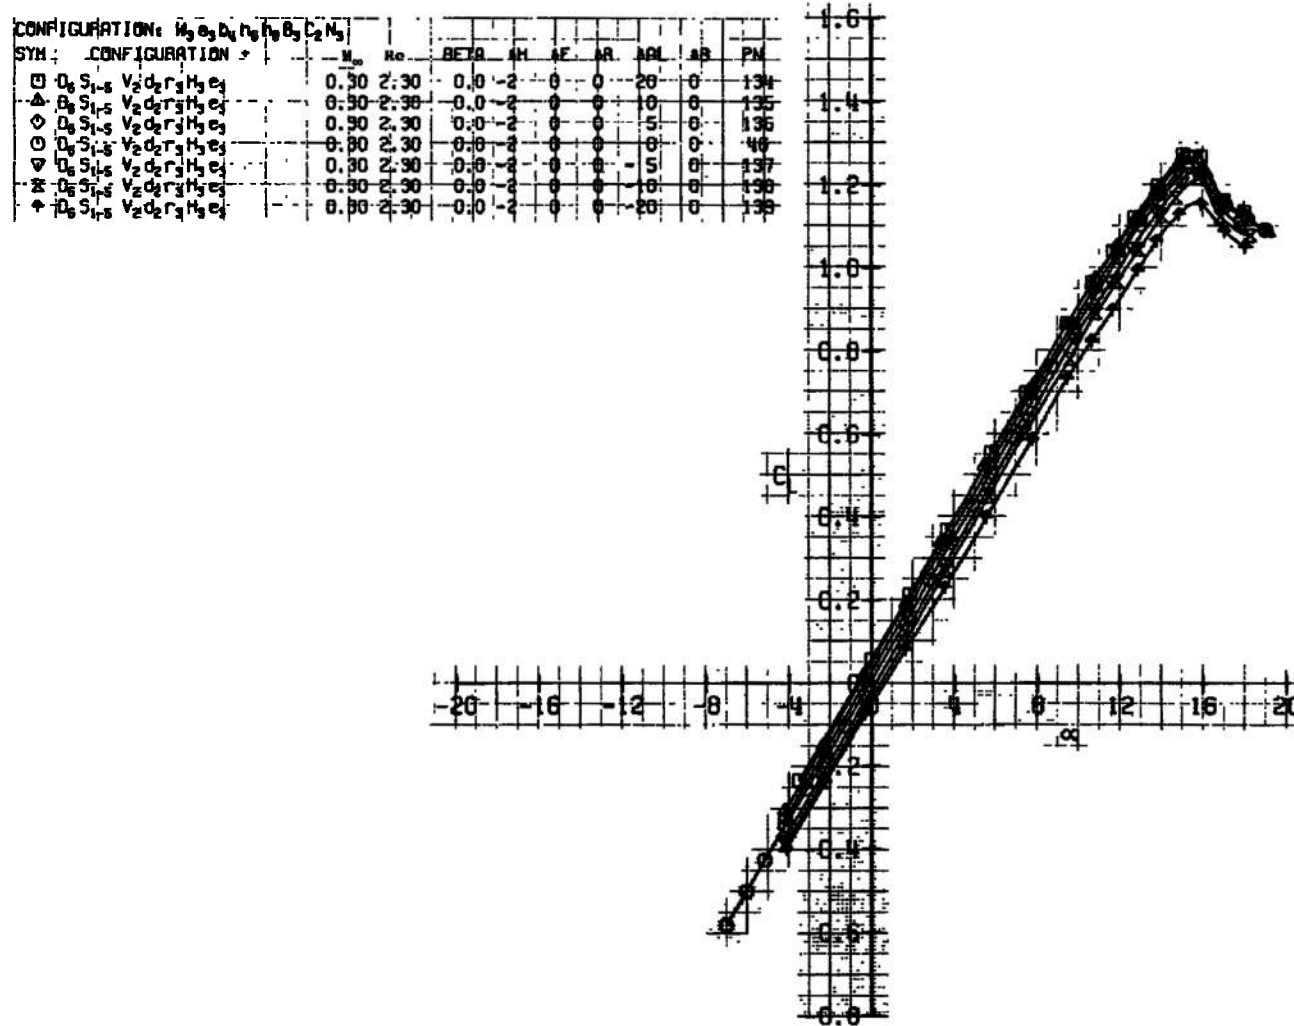
a. $M_\infty = 0.30$
Fig. 8 Aileron Effectiveness

a. Continued
Fig. 8 Continued

a. Continued
Fig. 8 Continued

64

a. Concluded
Fig. 8 Continued

CONFIGURATION: $H_3 a_3 b_4 h_6 h_8 B_3 C_2 N_3$

SYM	CONFIGURATION +	M_∞	Re	BETA	δH	δE	δR	$\delta P'$	δR	PN
□	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$	0.60	4.5	0	-2	0	0	20	0	148
△	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$	0.60	4.5	0	-2	0	0	10	0	149
◇	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$	0.60	4.5	0	-2	0	0	5	0	150
⊕	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$	0.60	4.5	0	-2	0	0	0	0	50
▽	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$	0.60	4.5	0	-2	0	0	-5	0	151
✕	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$	0.60	4.5	0	-2	0	0	10	0	152
✦	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$	0.60	4.5	0	-2	0	0	-20	0	153

b.　$M_\infty = 0.60$

Fig. 8　Continued

b. Continued
Fig. 8 Continued

b. Continued
Fig. 8 Continued

b. Concluded
Fig. 8 Continued

c. $M_\infty = 0.70$
Fig. 8 Continued

CONFIGURATION: $W_9 e_3 b_4 h_6 f_9 B_3 C_2 N_3$

SYM.	CONFIGURATION +	M_∞	Re	BETA	δH	δE	δR	$\delta\delta L$	δB	PN
△	$D_6 S_{1-5} V_2 d_2 r_3 H_9 e_3$	0.70	4.50	0.0	-2	0	0	+10	0	156
⊙	$D_6 S_{1-5} V_2 d_2 r_3 H_9 e_3$	0.70	4.50	0.0	-2	0	0	0	0	52
✕	$D_6 S_{1-5} V_2 d_2 r_3 H_9 e_3$	0.70	4.50	0.0	-2	0	0	-10	0	155

c. Continued

Fig. 8 Continued

c. Continued
Fig. 8 Continued

c. Concluded
Fig. 8 Continued

d. M_∞ = 0.75

Fig. 8 Continued

d. Continued
Fig. 8 Continued

CONFIGURATION: $H_3 B_3 D_4 h_6 h_8 B_3 C_2 N_3$

SYM	CONFIGURATION	M_∞	Re	BETA	δH	δE	δR	δAL	δB	PN
△	$D_8 S_{1.5}$ $V_2 d_2 r_3 H_3 e_4$	0.75	4.5	0	-2	0	0	10	0	162
⊕	$D_8 S_{1.5}$ $V_2 d_2 r_3 H_3 e_4$	0.75	4.5	0	-2	0	0	0	0	54
X	$D_8 S_{1.5}$ $V_2 d_2 r_3 H_3 e_4$	0.75	4.5	0	-2	0	0	-10	0	161

1.6

1.4

1.2

1.0

0.8

0.6

C_L

0.4

0.2

0

-0 0.02 0.04 0.06 0.08 0.10 0.12 0.14 0.16 0.18 0.20 0.22 0.24 0.26 0.28 0.30 0.32 0.34 0.36

C_D

0.2

0.4

0.6

0.8

d. Continued

Fig. 8 Continued

CONFIGURATION: $H_9 e_3 U_4 h_8 h_8 B_3 C_2 N_3$

SYM	CONFIGURATION	M_∞	Re	BETA	6H	6F	6R	6AL	6B	PN
△	$B_0 S_{1-6} V_2 U_2 r_3 h_3 e_3$	0.75	4.5	0	-2	0	0	-10	0	162
⊙	$B_0 S_{1-6} V_2 d_2 r_3 h_3 e_3$	0.75	4.5	0	-2	0	0	0	0	54
X	$B_0 S_{1-6} V_2 b_2 r_3 h_3 e_3$	0.75	4.5	0	-2	0	0	-10	0	16

d. Concluded
Fig. 8 Continued

CONFIGURATION: $W_3 a_3 b_4 h_6 h_8 B_3 C_2 N_3$

SYM	CONFIGURATION +	M_∞	Re	BETA	αH	δE	δB	δRUL	δB	PN
△	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$	0.80	4.5	0	-2	0	0	10	0	158
⊙	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$	0.80	4.5	0	-2	0	0	0	0	58
⊠	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$	0.80	4.5	0	-2	0	0	-10	0	158

e. $M_\infty = 0.80$

Fig. 8 Continued

e. Continued
Fig. 8 Continued

e. Continued
Fig. 8 Continued

80

e. Concluded
Fig. 8 Continued

CONFIGURATION: H₃a₃b₃h₃h₃B₃Q₂N₃

SYM.	CONFIGURATION	M∞	Re	BETA	ØL	ØE	ØR	⌷AL	⌷B	PN
△	b₃S₁₋₆ V₂b₂r₃H₃e₃	0.75 4.5	0	-2	0	0	10	20	180
⊙	b₃S₁₋₆ V₂b₂r₃H₃e₃	0.75 4.5	0	-2	0	0	0	20	170
⊠	b₃S₁₋₆ V₂b₂r₃H₃e₃	0.75 4.5	0	-2	0	0	-10	20	170

f. $M_\infty = 0.75$

Fig. 8 Continued

82

f. Concluded
Fig. 8 Continued

CONFIGURATION: $\overline{H}_3 a_3 q_4 n_6 H_{16} B_3 C_2 N_3$

SYM	CONFIGURATION	M_∞	Re	BETA	δH	δE	δA	δBL	δB	PN
△	$O_6 S_{16}$ $V_2 d_2 r_3 H_9 e_3$	0.80	4.5	0	-2	0	0	10	20	181
⊙	$O_6 S_{1-6}$ $V_2 d_2 r_3 H_9 e_3$	0.80	4.5	0	-2	0	0	0	20	182
⊠	$O_6 S_{1-6}$ $V_2 d_2 r_3 H_9 e_3$	0.80	4.5	0	-2	0	0	-10	20	183

g.　M_∞ = 0.80
Fig. 8 Continued

g. Concluded

Fig. 8 Concluded

a. $M_\infty = 0.30$
Fig. 9 Rudder Effectiveness

CONFIGURATION: $W_3a_3b_4h_8B_3C_2N_3$										
SYM	CONFIGURATION	M_∞	Re	BETA	NH	SE	SR	AL	SB	PN
✗	D_6S_{15}	0.30	2.3	0			0		0	427
⊕	$D_6S_{15}\ V_2d_2r_3H_3e_3$	0.30	2.3	0	-2	0	0	0	0	271
◇	$D_6S_{15}\ V_2d_2r_3H_3e_3$	0.30	2.3	0	-2	0	-10	0	0	272
△	$D_6S_{15}\ V_2d_2r_3H_3c_3$	0.30	2.3	0	-2	0	-20	0	0	273
□	$D_6S_{15}\ V_2d_2r_3H_3c_3$	0.30	2.3	0	-2	0	-30	0	0	274

a.   Continued

Fig. 9   Continued

CONFIGURATION: $H_3 e_3 b_4 h_8 h_8 B_3 C_2 N_3$

SYM	CONFIGURATION +	M_∞	Re	BETA	δH	δE	δR	δAL	δB	PN
X	$D_6 S_{1-5}$	0.30	2.3	0	—	—	—	0	0	427
⊙	$D_6 S_{1-5}$ $V_2 d_2 r_3 H_3 e_3$	0.30	2.3	0	-2	0	0	0	0	271
◇	$D_6 S_{1-5}$ $V_2 d_2 r_3 H_3 e_3$	0.30	2.3	0	-2	0	10	0	0	272
△	$D_6 S_{1-5}$ $V_2 d_2 r_3 H_3 e_3$	0.30	2.3	0	-2	0	20	0	0	273
▫	$D_6 S_{1-5}$ $V_2 d_2 r_3 H_3 e_3$	0.30	2.3	0	-2	0	30	0	0	274

a. Continued

Fig. 9 Continued

CONFIGURATION: $W_3 e_3 b_4 h_6 h_8 B_3 C_2 N_3$

SYM	CONFIGURATION +	M_∞	R_c	BETA	δH	δE	δR	δRL	δB	PN
X	$D_6 S_{1-5}$	0.30	2.3	0	—	—	—	0	0	427
○	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$	0.30	2.3	0	-2	0	0	0	0	271
◇	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$	0.30	2.3	0	-2	0	10	0	0	272
△	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$	0.30	2.3	0	-2	0	20	0	-0	273
□	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$	0.30	2.3	0	-2	0	30	0	0	274

a. Concluded
Fig. 9 Continued

b. $M_\infty = 0.60$
Fig. 9 Continued

b. Continued
Fig. 9 Continued

b. Continued
Fig. 9 Continued

CONFIGURATION: $H_3S_3L_4I_5R_6B_3C_2N_9$

SYM	CONFIGURATION	M_∞	Re	BETA	ΔM	ΔE	AR	ΔAL	ΔB	PN
X	D_8S_{16}	0.60	4.5	0				0	0	431
⊙	$D_8S_{16}V_2d_2r_3H_3e_2$	0.60	4.5	0	-2	0	0, 0		0	288
◇	$D_8S_{16}V_2d_2r_3H_3e_2$	0.60	4.5	0	-2	0	10, 0		0	290
△	$D_8S_{16}V_2d_2r_3H_3c_2$	0.60	4.5	0	-2	0	20, 0		0	292
▢	$D_8S_{16}V_2d_2r_3H_3e_2$	0.60	4.5	0	-2	0	30, 0		0	293

b. Concluded
Fig. 9 Continued

CONFIGURATION: $H_3 s_3 b_4 r_6 e_6 B_3 C_2 N_1$

SYM	CONFIGURATION	M_∞	Re	BETA	δH	δF	δA	δAL	δB	PN
X	$D_8 S_{15}$	0.70	4.5	0	—	—	0	—	0	435
⊙	$D_8 S_{15} V_2 d_2 r_3 H_3 e_3$	0.70	4.5	0	2	0	0	—	0	54
⊕	$D_8 S_{15} V_2 d_2 r_3 H_3 e_3$	0.70	4.5	0	-2	0	10	0	0	285

c. $M_\infty = 0.70$
Fig. 9 Continued

c. Continued
Fig. 9 Continued

CONFIGURATION: $H_{29}e_{3}U_{4}U_{5}H_{9}B_{3}C_{2}H_{1}$

SYM.	CONFIGURATION +	M_∞	Re	BETA	δH	δE	δR	δR	δB	PN
X	B_9S_{15}	0.70	4.5	0				0	0	438
⊙	$B_9S_{15} V_2O_7r_3H_9e_3$	0.70	4.5	0	-2	0	0	0	0	52
◇	$B_9S_{15} V_2O_7r_3H_9e_3$	0.70	4.5	0	-2	0	10	0	0	205

c. Continued

Fig. 9 Continued

c. Concluded
Fig. 9 Continued

d. $M_\infty = 0.75$
Fig. 9 Continued

CONFIGURATION: $W_3 a_3 b_4 h_6 h_8 B_3 C_2 N_3$

SYM	CONFIGURATION	M_∞	Re	BETA	ΔH	δE	δR	δAL	δB	PNL
X	$D_6 S_{1-5}$	0.75	4.5	0	+	+	+	0	0	435
O	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$	0.75	4.5	0	-2	0	0	0	0	288
◇	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$	0.75	4.5	0	-2	0	10	0	0	284

C_L

0.01 0.02 0.03 0.04 0.05 0.06 0.07 0.08 0.09 0.10 0.11 0.12 0.13 0.14 0.15 0.16 0.17 0.18

C_D

d. Continued

Fig. 9 Continued

CONFIGURATION: $H_3 e_3 b_4 h_5 r_8 B_3 C_2 N_3$

SYM.	CONFIGURATION +	M_∞	Re	BETA	δL	δE	δB	δAL	δB	PN
X	$D_8 S_{1-5}$	0.75	4.5	0	+	+	0	0	0	435
⊖	$D_8 S_{1-5} V_2 d_2 r_3 H_3 e_3$	0.75	4.5	0	-2	0	0	0	0	283
◇	$D_8 S_{1-5} V_2 d_2 r_3 H_3 e_3$	0.75	4.5	0	-2	0	10	8	0	284

d. Continued

Fig. 9 Continued

CONFIGURATION: $H_2 d_5 b_4 h_5 h_4 B_3 C_2 N_1$												
SYM	CONFIGURATION 4		M_∞	Re	BETA	δH	δE	δR	δAI	δB	PN
X	$D_0 B_{1-6}$		0.75	4.5	0				0	0	435
O	$D_0 B_{1-6} V_2 d_{2r} t_3 t_3 c_3$		0.75	4.5	0	-2	0	0	0	0	283
◇	$D_0 B_{1-6} V_2 d_{2r} t_3 t_3 c_3$		0.75	4.5	0	-2	0	10	0	0	284

d. Concluded
Fig. 9 Continued

CONFIGURATION: $W_{13}a_3b_4h_6h_8B_3C_2N_3$

SYM	CONFIGURATION	M_∞	Re	BETA	dH	dE	dR	dDL	dB	PN
X	$D_6S_{1.5}$	0.80	4.5	0				0	0	437
⊙	$D_6S_{1.5}$ $v_2d_2r_3H_3e_3$	0.80	4.5	0	-2	0	0	0	0	280
◇	$D_6S_{1.5}$ $v_2d_2r_3H_3e_3$	0.80	4.5	0	-2	0	-10	0	0	282

e. $M_\infty = 0.80$

Fig. 9 Continued

e. Continued
Fig. 9 Continued

CONFIGURATION: $H_3 e_3 b_4 h_6 h_8 B_3 C_2 N_3$

SYM	CONFIGURATION	M_∞	Re.	BETA	δH	δE	δB	δAL	δB	PN
✗	$D_8 S_{1-5}$	0.80	4.5	0	—	—	—	0	0	437
☉	$D_8 S_{1-5} V_2 d_2 r_3 H_3 e_3$	0.80	4.5	0	-2	0	0	0	0	280
◇	$D_8 S_{1-5} V_2 d_2 r_3 H_3 e_3$	0.80	4.5	0	-2	0	10	0	0	282

e. Continued

Fig. 9 · Continued

CONFIGURATION: $W_3 e_3 b_4 n_6 n_9 B_3 C_2 N_3$

SYM	CONFIGURATION	M_∞	Re	BETA	δH	δE	δR	δAL	δB	PN
✕	$D_6 S_{1-5}$	0.80	4.5	0	—	—	—	0	0	437
⊙	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$	0.80	4.5	0	-2	0	0	0	0	280
◇	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$	0.80	4.5	0	-2	0	10	0	0	282

e. Concluded

Fig. 9 Concluded

CONFIGURATION: $H_3B_3b_4h_5h_6B_3C_2N_3$

SYM	CONFIGURATION	M_∞	Re	BETA	ΔH	ΔE	ΔR	ΔAL	ΔB	PN
⊙	$D_6S_{1.5}V_2d_2r_3H_5e_3$	0.30	2.30	0.0	-2	0	0	0	0	46
✕	$D_6S_{1-5}V_2d_2r_3H_5e_3$	0.30	2.30	0.0	-2	0	0	0	20	168
▢	$D_6S_{1-5}V_2d_2r_3H_5e_3$	0.30	2.30	0.0	-2	0	0	0	60	207
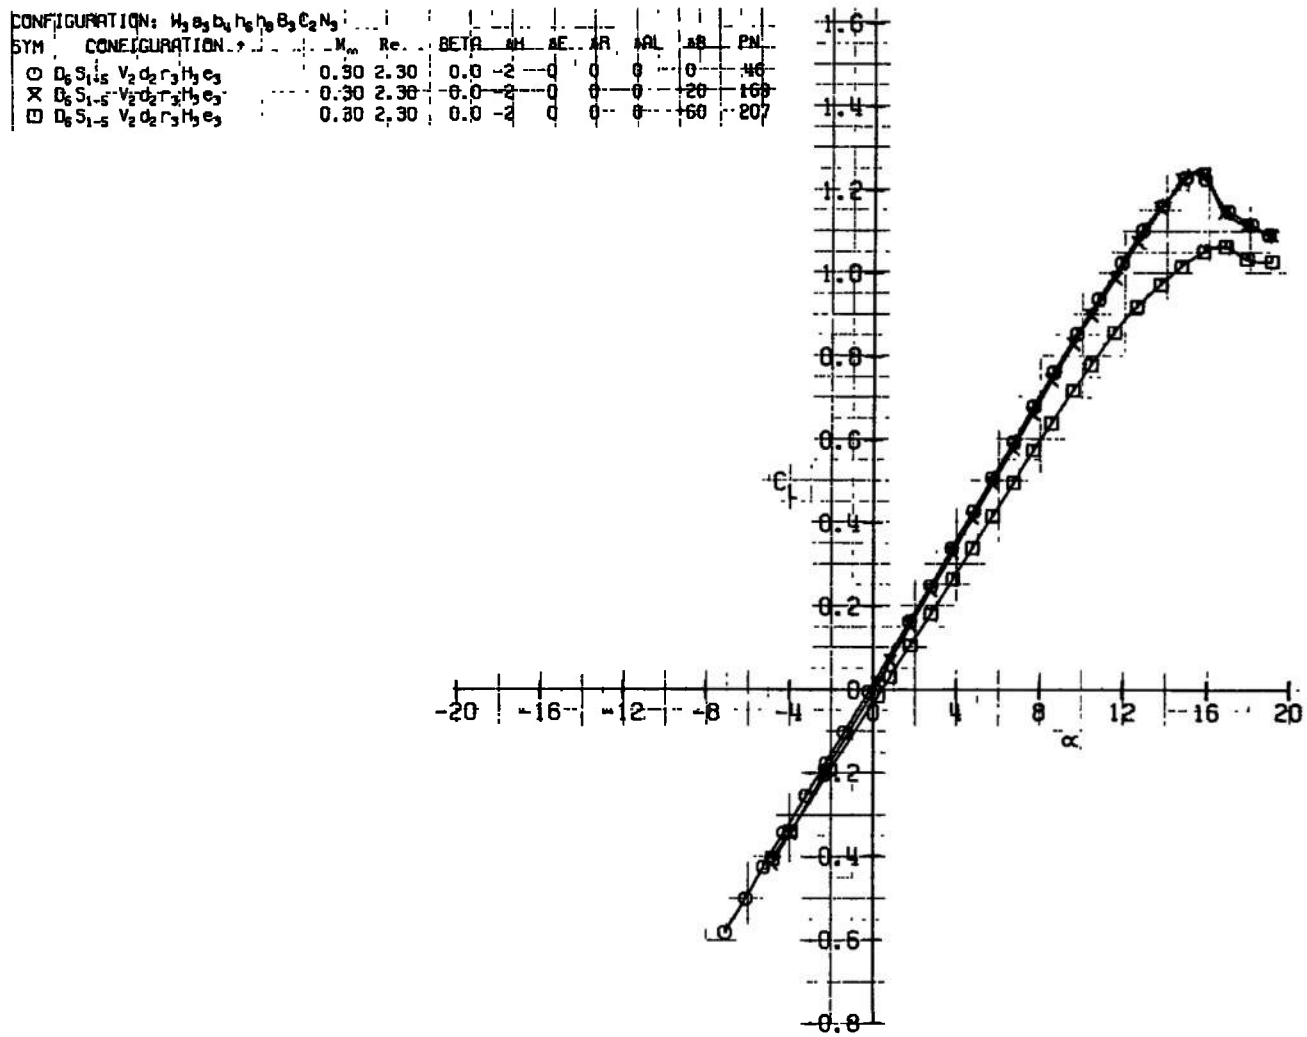
a. $M_\infty = 0.30$

Fig. 10 Speed Brake Effectiveness

CONFIGURATION: $H_3 e_3 b_4 h_6 h_6 B_3 c_2 N_3$

SYM	CONFIGURATION	M_∞	Re	BETA	δH	δE	δR	δAL	δB	PN
⊕	$D_6 S_{1-S} V_2 d_2 r_3 H_3 e_3$	0.30	2.30	0.0	-2	0	0	0	0.	46
X	$B_6 S_{1-S} V_2 d_2 r_3 H_3 e_3$	0.30	2.30	0.0	-2	0	0	0	+20	-169
▢	$D_6 S_{1-S} V_2 d_2 r_3 H_3 e_3$	0.30	2.30	-0.0	-2	0	0	0	+60	207

a. Continued

Fig. 10 Continued

CONFIGURATION: $H_3 e_3 b_4 h_6 h_8 B_3 C_2 N_3$

SYM.	CONFIGURATION	M_∞	Re	BETA	δH	δE	δR	δAL	δB	PN
⊙	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$	0.30	2.30	0.0	-2	0	0	0	0	46
X	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$	0.30	2.30	0.0	-2	0	0	0	+20	169
⊡	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$	0.30	2.30	0.0	2	0	0	0	+60	207
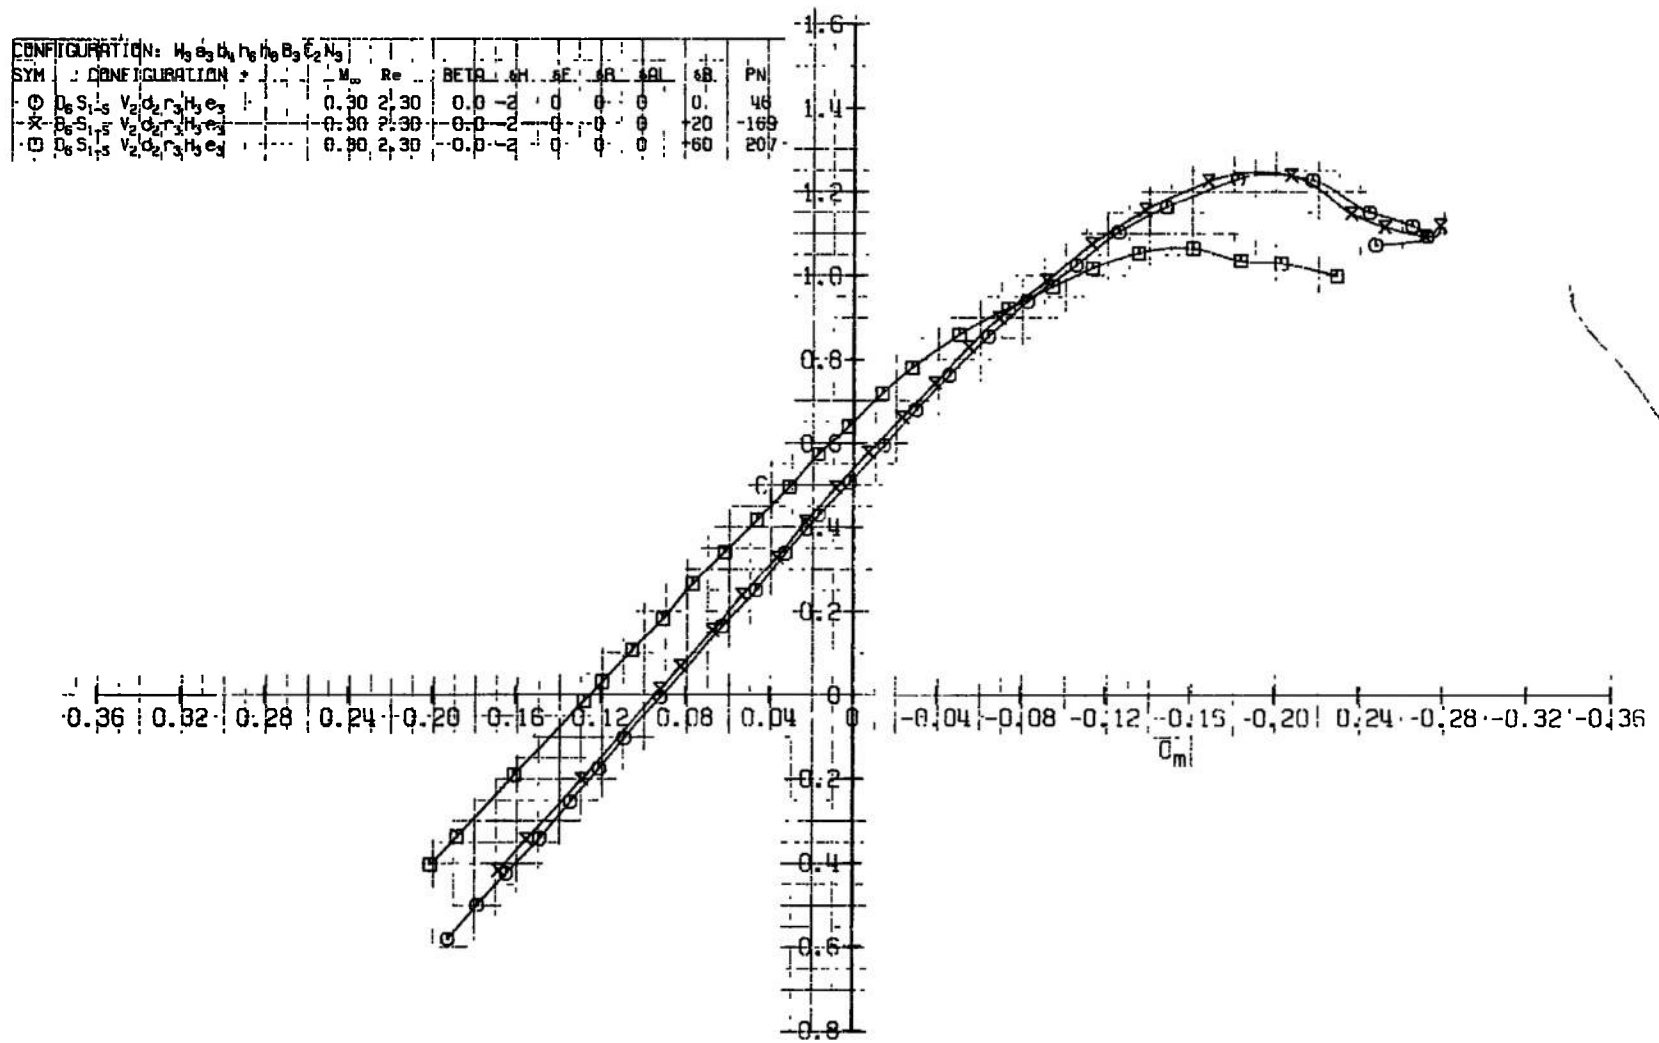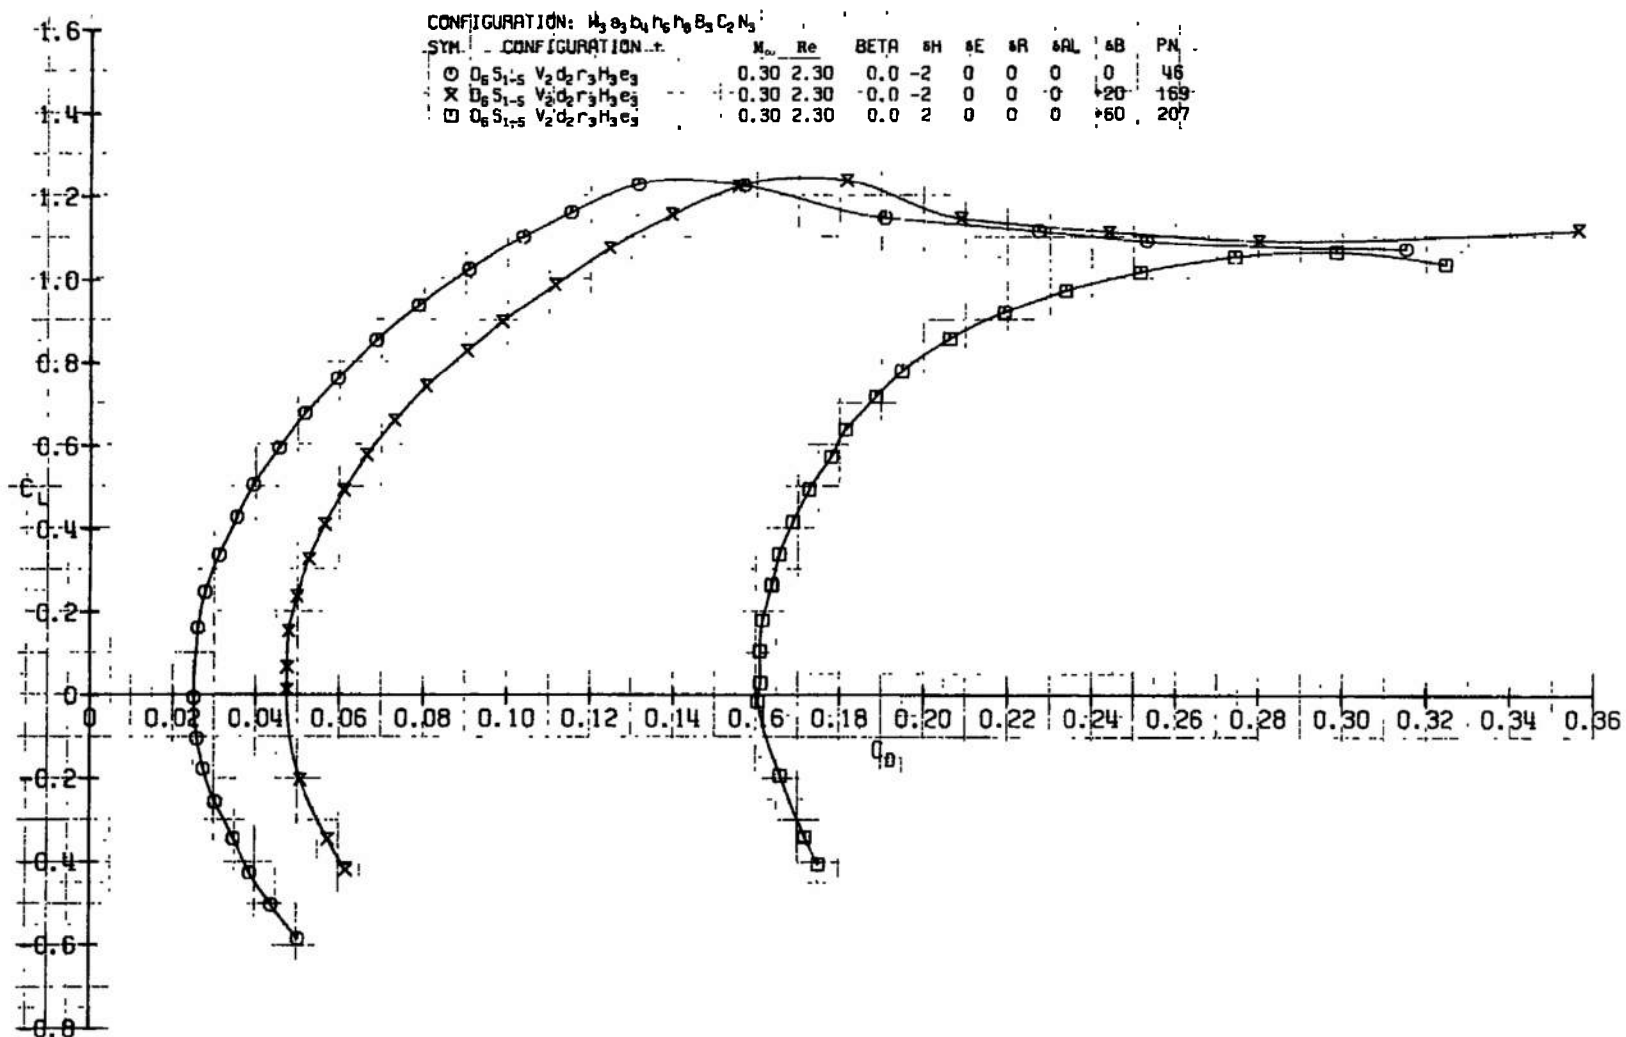
a. Concluded

Fig. 10 Continued

CONFIGURATION: $H_3 e_3 b_4 h_5 h_8 B_3 C_2 N_3$

SYM	CONFIGURATION	M_∞	Re	BETA	αH	δE	δR	$\Delta \alpha L$	ΔB	PN
⊙	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$	0.60	4.50	0.0	-2	0	0	0	0	50
✕	$D_6 S_{1-6} V_2 d_2 r_3 H_3 e_3$	0.60	4.50	0.0	-2	0	0	0	+20	-170
▢	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$	0.60	4.50	0.0	-2	0	0	0	+60	201

b. $M_\infty = 0.60$

Fig. 10 Continued

b. Continued

Fig. 10 Continued

b. Concluded

Fig. 10 Continued

111

CONFIGURATION₁ H₃e₃b₄h₆N₈B₃C₂N₃

SYM	CONFIGURATION	M∞	Rc	BETA	4H	4E	4R	4AL	4B	PN
⊙	D₆S₁₋₅ V₂d₂r₃H₃e₃	0.70	4.50	0.0	-2	0	0	0	0	52
✕	D₆S₁₋₅ V₂d₂r₃H₃e₃	0.70	4.50	0.0	-2	0	0	0	120	176
⊡	D₆S₁₋₅ V₂d₂r₃H₃e₃	0.70	4.50	0.0	-2	0	0	0	60	198

c. $M_\infty = 0.70$
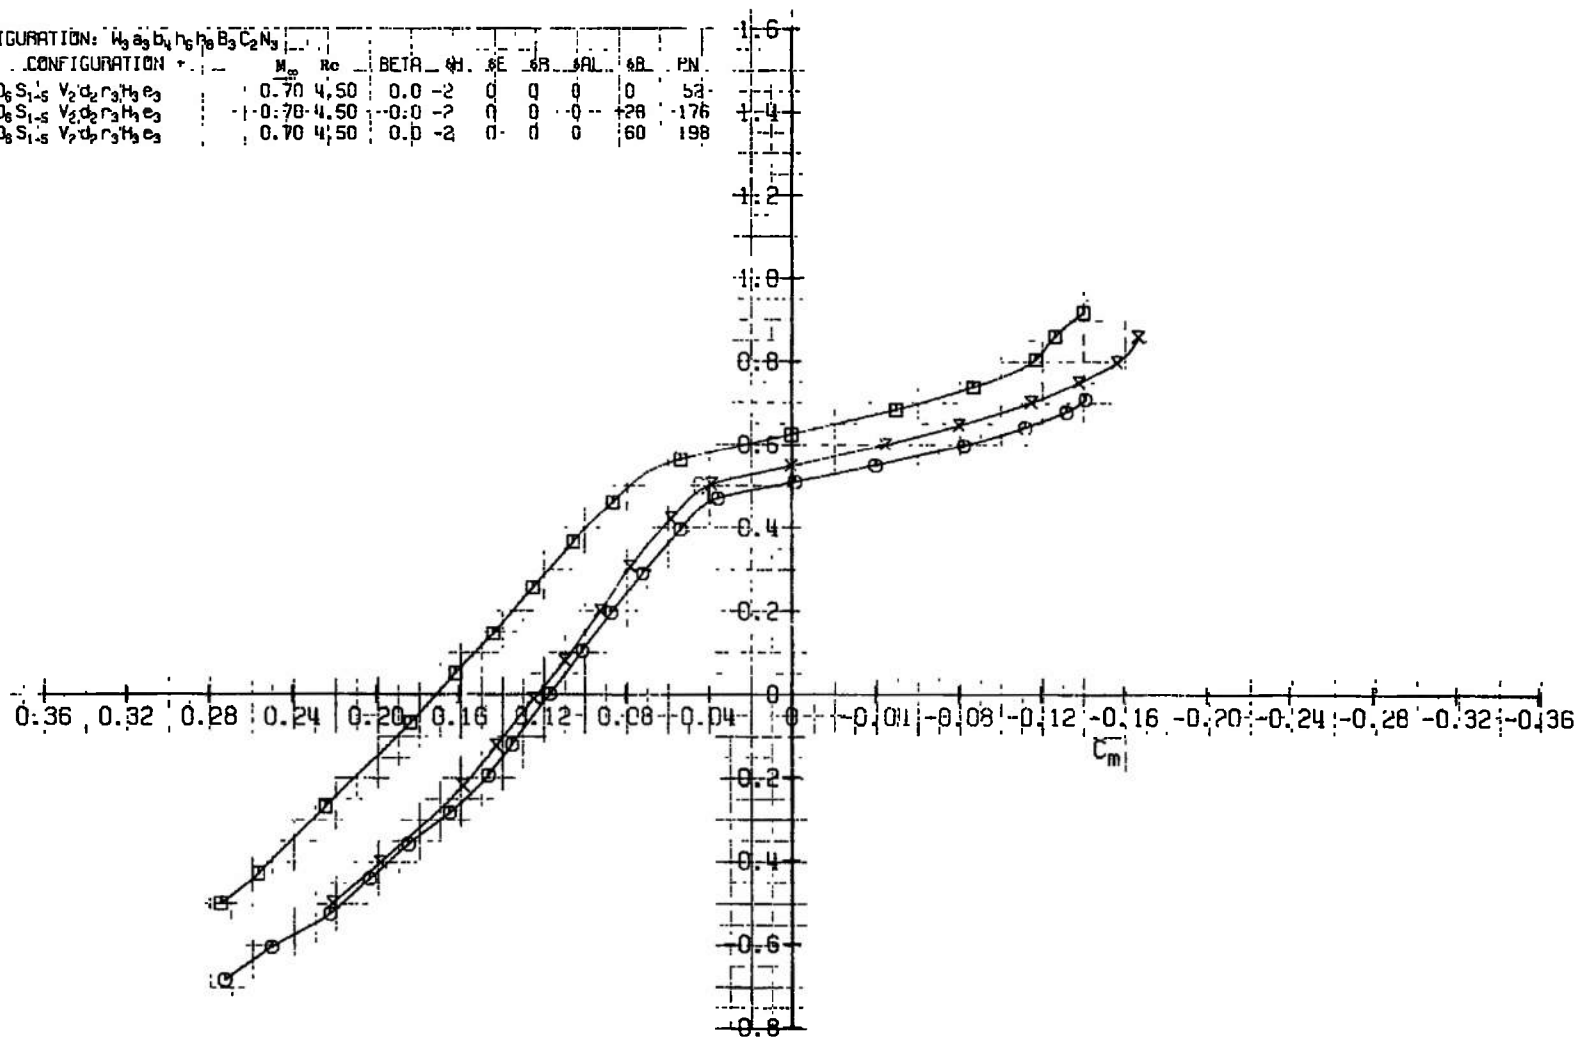
Fig. 10 Continued

c. Continued
Fig. 10 Continued

c. Concluded
Fig. 10 Continued

d. $M_\infty = 0.75$
Fig. 10 Continued

CONFIGURATION: $W_3 a_3 b_4 h_6 H_8 B_3 C_2 N_3$

SYM	CONFIGURATION	M_∞	Re	BETA	δH	δE	δB	δBL	δB	PN
⊙	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$	0.75	4.50	0.0	-2	0	0	0	0	54
✗	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$	0.75	4.50	0.0	-2	0	0	0	+20	179
⊡	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$	0.75	4.50	0.0	-2	0	0	0	+60	195

d. Continued

Fig. 10 Continued

CONFIGURATION: $H_3 s_3 b_4 h_5 h_8 B_3 C_2 N_3$

SYM	CONFIGURATION	M_∞	Re	BETA	δH	δE	δR	δA_L	δB	PN
⊙	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$	0.75	4.50	0.0	-2	0	0	0	0	54
✕	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$	0.75	4.50	0.0	-2	0	0	0	-20	179
▢	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$	0.75	4.50	0.0	-2	0	0	0	60	195

d. Concluded

Fig. 10 Continued

CONFIGURATION: $H_3 a_3 b_4 h_6 h_6 B_3 C_{12} N_3$

SYM	CONFIGURATION	M_∞	Re	BETA	δH	δE	δR	δAIL	δB	PN
⊙	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$	0.80	4.50	0.0	-2	0	0	0	0	56
X	$D_6 S_{1-6} V_2 d_2 r_3 H_3 e_3$	0.80	4.50	0.0	-2	0	0	0	120	182
▣	$D_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$	0.80	4.50	0.0	-2	0	0	0	60	192

e. $M_\infty = 0.80$
Fig. 10 Continued

e. Continued
Fig. 10 Continued

CONFIGURATION: $W_3 e_3 b_4 h_8 h_8 B_3 C_2 N_3$

SYM	CONFIGURATION	M_∞	Rc	BETA	δH	δE	δR	δAL	δB	PN
☉	$D_6 S_{1-S} V_2 d_2 r_3 H_3 e_3$	0.80	4.50	0.0	-2	0	0	0	0	56
✕	$D_6 S_{1-S} V_2 d_2 r_3 H_3 e_3$	0.80	4.50	0.0	-2	0	0	0	+20	182
☐	$D_6 S_{1-S} V_2 d_2 r_3 H_3 e_3$	0.80	4.50	0.0	-2	0	0	0	+60	192

e. Concluded

Fig. 10 Concluded

TABLE I
INDEX TO MODEL COMPONENTS

Symbol	Components
a_3	Aileron
B_3	Body
b_4	Speed Brake
C_2	Canopy
d_2	Dorsal
D_6	Duct
D_7	Duct with Core Cowl
h_1	Dual Ejecton Rack
H_3e_3	Horizontal Tail with Elevator
$h_{6,8}$	Flap Track
N_3	Nacelle
S_{1-5}	Pylons
V_2r_3	Vertical Tail with Rudder
w_1^6	500-lb Bomb, six, MK82
w_1^{18}	500-lb Bomb, eighteen, MK82
w_2^{10}	Napalm Bomb, ten, BLU-1/B
W_3	Wing

TABLE I (Concluded)

X $\qquad$ $W_3a_3h_6h_8B_3C_2N_3$ (Basic Configuration)

XD_6

XD_6S_{1-5}

$XD_6S_{1-5}V_2d_2r_3$

$XD_6S_{1-5}V_2d_2r_3H_3e_3$

$XD_7S_{1-5}V_2d_2r_3H_3e_3$

$XD_6S_{1-5}V_2d_2r_3H_4e_3$

$XD_6S_{1-5}w_1{}^6V_2d_2r_3H_3e_3$

$XD_6S_{1-5}w_1{}^{18}V_2d_2r_3H_3e_3$

$XD_6S_{1-5}w_2{}^{10}V_2d_2r_3H_3e_3$

TABLE II
SUMMARY OF TEST DATA

Configuration $X = W_3a_3b_4h_6h_8B_3C_2N_3$	α, deg	β, deg	RN x 10^{-6}	Controls	Mach Number				
					0 30	0.60	0.70	0 75	0.80
					Part Number				
Effect of M_∞ and R_N									
XD_6	V	0	2.3		454	453	---	---	---
XD_6S_{1-5}					427	429	445	444	443
$XD_6S_{1-5}V_2r_3$					337	340	---	---	---
$XD_6S_{1-5}V_2r_3H_3e_3$					45/271	28/279	90	92	91
$XD_6S_{1-5}V_2r_3H_4e_3$					369	377	411	409	---
$XD_6S_{1-5}V_2r_3H_3e_3$			2.7		---	---	58	60	62
XD_6S_{1-5}			4.5		---	431	433	435	437
$XD_6S_{1-5}V_2r_3$					---	341	343	345	347
$XD_6S_{1-5}V_2r_3H_3e_3$					---	50/288	52/119	54/283	56/280
XD_6			7.0		---	449	450	451	452
XD_6S_{1-5}					---	439	440	441	442
$XD_6S_{1-5}V_2r_3$					---	350	351	352	353
$XD_6S_{1-5}V_2r_3H_3e_3$					---	56	68	70	72
Effect of Stores				δ_E, deg					
$XD_6S_{1-5}w_{1_{1-3}}^6 V_2d_2r_3H_3e_3$			2.3	10	260	261	263	266	267
$XD_6S_{1-5}h_{1_{1-4}}w_{1_{1-5}}^{18} V_2d_2r_3H_3e_3$			2.3		241	243	245	247	249
			4.5		---	---	253	251	---
$XD_6S_{1-5}w_{2_{1-5}}^{10} V_2d_2r_3H_3e_3$			2.3		215	217	235	233	231
			4.5		---	225	227	223	229
			7.0		---	219	221	---	---
Elevator Effectiveness				δE, deg					
$XD_6S_{1-5}V_2d_2r_3H_3e_3$			2.3	10	97	109	---	---	---
				5	99	104	---	---	---
				0	46*	48*	---	---	---
				-5	100	103	---	---	---
				-10	101	102	---	---	---

TABLE II (Continued)

Configuration X = $W_3a_3b_4h_6h_8B_3C_2N_3$	α, deg	β, deg	RN x 10^{-6}	Controls	Mach Number				
					0.30	0 50	0.70	0.75	0 80
					Part Number				
Elevator Effectiveness (continued)				δ_E, deg					
$XD_6S_{1-5}V_2d_2r_3H_3e_3$	V	0	4.5	10	---	111	120	122	130
				5	---	112	118	124	129
				0	---	50*	52*	54*	56*
				-5	---	113	117	123	128
				-10	---	114	116	125	127
			2.3	10	367	381	---	---	---
				5	368	380	---	---	---
				0	369	377	---	---	---
				-5	371	376	---	---	---
				-10	372	375	---	---	---
			4.5	10	---	383	395	397	---
				5	---	384	394	398	407
				0	---	385	392	399	406
				-5	---	387	391	401	405
				-10	---	388	390	402	404
Horizontal Stabilizer Effectiveness				δ_H, deg					
$XD_6S_{1-5}V_2d_2r_3H_3e_3$			2 3	2	318	319	---	---	---
				0	327	328	---	---	---
				-2	46*	48*	---	---	---
			4.5	2	---	320	321	322	323
				0	---	329	330	331	332
				-2	---	50*	52*	54*	56*
Aileron Effectiveness				δ_A, deg / δ_B, deg					
$XD_6S_{1-5}V_2d_2r_3H_3e_3$			2 3	20 / 0	134	146	---	---	---
				10	135	145	299	296	---
				5	136	144	---	---	---

TABLE II (Continued)

Configuration X = $W_3a_3b_4n_6h_8B_3C_2N_3$	α, deg	β, deg	RN x 10^{-5}	δ_A, deg	δ_B, deg	Mach Number 0.30	0.60	0.70	0.75	0.80
						Part Number				
Aileron Effectiveness (continued)										
$XD_6S_{1-5}V_2d_2r_3H_3e_3$	V	0	2.3	0	0	46*	48*	90*	92*	91*
				-5		137	143	---	---	---
				-10		138	142	298	297	---
				-20		139	141	---	---	---
			4.5	20		---	148	---	---	---
				10		---	149	156	162	158
				5		---	150	---	---	---
				0		50*	52*	52*	54*	56*
				-5		---	151	---	---	---
				-10		---	152	155	161	159
				-20		---	153	---	---	---
			2.3	30	20	167	---	---	---	---
				20		---	188	---	---	---
				10		168	187	---	---	---
				0		169	186	---	---	---
				-10		170	185	---	---	---
				-20		---	184	---	---	---
				-30		171	---	---	---	---
			4.5	10		---	174	175	180	181
				0		---	173	176	179	182
				-10		---	172	177	178	183
			2.3	30	60	209	---	---	---	---
				10		208	203	---	---	---
				0		207	204	---	---	---
				-10		206	---	---	---	---
				-30		205	---	---	---	---
	V	0	4.5	10		---	202	197	196	191

TABLE II (Continued)

Configuration X = $W_3a_3b_4h_6h_8B_3C_2N_3$	α, deg	β deg	RN × 10^{-6}	Controls		Mach Number				
						0.30	0.60	0.70	0.75	0.80
						Part Number				
Aileron Effectiveness (continued)				δ_A, deg	δ_B, deg					
$XD_6S_{1-5}V_2d_2r_3H_3e_3$	V	0	4 5	0	60	---	201	198	195	192
↓			4.5	-10		---	200	199	194	193
Horizontal Tail Dihedral Effects				δ_H, deg	δ_B, deg					
$XD_6S_{1-5}V_2d_2r_3H_4e_3$			2 3	0	0	369*	---	---	---	---
			4.5	0	0	---	385*	392*	399	406*
			2.3	0	-60	414	---	---	---	---
↓			4.5	0	-60	---	418	420	421	422
$XD_6S_{1-5}V_2d_2r_3H_3e_3$			2.3	10	0	48*/271	---	---	---	---
			4.5	10	0	---	50*/288	52*	54*	56*/280
			2 3	10	-60	207*	---	---	---	---
↓			4.5	10	-60	---	201*	198*	195*	192*
Rudder Effectiveness				δ_R, deg						
$XD_6S_{1-5}V_2d_2r_3H_3e_3$			2 3	0		46*/271	48*/279	---	92*	---
				10		272	278	---	295	---
				20		273	277	---	---	---
			↓	30		274	275	---	---	---
			4.5	0		---	50/288	52*	54*/283	56*/280
				10		---	290	286	284	282
				20		---	292	---	---	---
↓			↓	30		---	293	---	---	---
Lateral-Directional Characteristics										
XD_6S_{1-5}			2.3			427*	429*	---	---	---
$XD_6S_{1-5}V_2d_2r_3$						337*	340*	---	---	---
$XD_6S_{1-5}V_2d_2r_3H_3e_3$	↓	↓	↓			46*/271	48*/279	---	---	---

TABLE II (Concluded)

Configuration $X = W_3 a_3 b_4 \bar{n}_6 h_8 B_3 C_2 N_3$	α, deg	β, deg	RN x 10^{-6}	Controls	Mach Number				
					0 30	0 60	0 70	0 75	0 80
					Part Number				
Lateral-Directional Characteristics (continued)									
$XD_6 S_{1-5} V_2 d_2 r_3 H_4 e_3$	V	0	2 3		399*	377	---	---	---
$XD_6 S_{1-5}$		5			428	430	---	---	---
$XD_6 S_{1-5} V_2 d_2 r_3$					338	339	---	---	---
$XD_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$					270	294	---	---	---
$XD_6 S_{1-5} V_2 d_2 r_3 H_4 e_3$					370	379	---	---	---
$XD_6 S_{1-5}$		0	4 5		---	431*	433*	435*	437
$XD_6 S_{1-5} V_2 d_2 r_3$					---	341*	343*	345*	247
$XD_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$					50*/288	52*	54*/283	54*/283	56*/280
$XD_6 S_{1-5} V_2 d_2 r_3 H_4 e_3$					---	385	392*	399*	---
$XD_6 S_{1-5}$		5			---	432	434	436	438
$XD_6 S_{1-5} V_2 d_2 r_3$					---	342	344	346	348
$XD_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$					---	289	287	285	281
$XD_6 S_{1-5} V_2 d_2 r_3 H_4 e_3$					---	380	393	400	---
Effect of Core Cowl									
$XD_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$		0	2.3		46*	48*	---	---	---
$XD_7 S_{1-5} V_2 d_2 r_3 H_3 e_3$			2.3		304	305	---	---	---
$XD_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$			7 0		---	66*	68*	70*	72*
$XD_7 S_{1-5} V_2 d_2 r_3 H_3 e_3$			7 0		---	309	307	312	313
Pressure Data									
$XD_{6R} D_{7L} S_{1-5} V_2 d_2 r_3 H_3 e_3$			2.3		22	7	---	---	---
			4.5		---	10	13	15	18
			7.0		---	8	---	---	20
Internal Drag Data									
$XD_6 S_{1-5} V_2 d_2 r_3 H_3 e_3$			2.3		27	39	---	---	---
			4.5		---	38	36	---	---
			7.0		---	34	32	30	29

* Listed Elsewhere

DOCUMENT CONTROL DATA - R & D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1. ORIGINATING ACTIVITY *(Corporate author)*	2a. REPORT SECURITY CLASSIFICATION
Arnold Engineering Development Center Arnold Air Force Station, Tennessee 37389	UNCLASSIFIED
	2b. GROUP N/A

3 REPORT TITLE

AERODYNAMIC CHARACTERISTICS OF A 0.12-SCALE MODEL OF THE A-9A
AIRCRAFT AT MACH NUMBERS FROM 0.30 TO 0.80

4 DESCRIPTIVE NOTES *(Type of report and inclusive dates)*

Final Report - August 17 to 24, 1971

5. AUTHOR(S) *(First name, middle initial, last name)*

Warren E. White, ARO, Inc.

6. REPORT DATE	7a. TOTAL NO OF PAGES	7b. NO OF REFS
December 1971	132	1

8a. CONTRACT OR GRANT NO	9a. ORIGINATOR'S REPORT NUMBER(S)
b. PROJECT NO.	AEDC-TR-71-271
c. Program Element 64211F	9b. OTHER REPORT NO(S) *(Any other numbers that may be assigned this report)*
d. System 329A	ARO-PWT-TR-71-207

10 DISTRIBUTION STATEMENT Distribution limited to U.S. Government agencies only;
this report contains information on test and evaluation of military hardware; December 1971; other requests for this document must be referred to Aeronautical Systems Division (SDXT), Wright-Patterson AFB, OH 45433.

11. SUPPLEMENTARY NOTES	12. SPONSORING MILITARY ACTIVITY
Available in DDC.	Aeronautical Systems Division (SDXT), Wright-Patterson AFB, OH 45433

13. ABSTRACT

Wind tunnel tests were conducted at Mach numbers from 0.30 to 0.80 and Reynolds numbers from 2.3 to 7.0 million on a 0.12-scale model of the A-9A aircraft to determine the effects of control surface deflections on the aerodynamic characteristics of the airplane. The results showed that the horizontal stabilizer was 20 to 50 percent more effective in pitching moment per degree of deflection than the elevator, the rudder remained effective at all Mach numbers, and the aileron deflections produced significant effects on lift, drag, and pitching and rolling moment. Minimum drag was increased by approximately 100 and 600 percent for speed brake deflections of 20 and 60 deg, respectively, at Mach numbers from 0.70 to 0.80.

Distribution limited to U. S. Government agencies only;
this report contains information on test and evaluation
of military hardware; December 1971; other requests for
this document must be referred to Aeronautical Systems
Division (SDXT), Wright-Patterson AFB, OH 45433.

DD FORM 1473
1 NOV 65

14. KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
A-9A						
jet aircraft						
control surfaces						
aerodynamic characteristics						
subsonic flow						
transonic wind tunnels						